



HOSHIZAKI

2021 PRICE GUIDE



EFFECTIVE: Apr 1, 2021 | REVISED: March 22, 2021

ICE EQUIPMENT

REFRIGERATION

ICE MACHINE MODEL CODE & USAGE GUIDE	3	STEELHEART FEATURES & BENEFITS	42
TYPES OF ICE	4	REFRIGERATION MODEL CODE	43
CUBER SERIES	5	STEELHEART SERIES	44
Undercounter Cubers with Built-In Bins	6-7	Upright Refrigerators & Freezers	45-48
<i>KMEdge X</i> Crescent Cubers	8-9	Dual Temps	48
<i>KMEdge</i> Crescent Cubers	10-14	Pass Thrus	49-50
<i>KMEdge</i> Crescent Cubers for Dispensers	14-15	Roll Ins	51
<i>KMEdge</i> Low Profile Crescent Cubers	16	Roll Thrus	52
<i>KMEdge</i> Crescent Cubers - Serenity Series	17-18	Compact Undercounter Refrigerator	53
IM Square Cubers (Specialty Ice)	19-20	Undercounter Refrigerators & Freezers	54-56
FLAKER / CUBELET SERIES	21	Undercounter Refrigerators & Freezers with Drawers	57-58
Undercounter Flakers with Built-In Bins	21-22	Worktop Refrigerators & Freezers	59-60
Flakers	22-23	Worktop Refrigerators & Freezers with Drawers	61-62
Undercounter Cubelet with Built-In Bins	24	Drawer / Door Combination Refrigerators	63
Cubelet Ice Machines	24-26	Prep Tables - Sandwich Top Refrigerators	64-65
Cubelets - Serenity Series	27	Prep Tables - Sandwich Top Refrigerators with Drawers	66
DISPENSER SERIES	28	Prep Tables - Mega Top Refrigerators	67-68
DCM Series	28-29	Prep Tables - Mega Top Refrigerators with Drawers	69-70
DB/DKM Hotel/Motel Dispensers	31	Prep Tables - Pizza Refrigerators	71
DM/DWM Dispensers	32	Prep Tables - Pizza Refrigerators with Drawers	72
ICE STORAGE BINS	33-34	Prep Tables - Pizza Refrigerators Drawer / Door Combos	73
DISPENSER STANDS	35	Refrigerated Equipment Stands	74
HCD ICE BAGGING SYSTEM	35	SUSHI CASES	75
TOP KIT MATRIX	36	GLASS DOOR MERCHANDISERS	76
REMOTE CONDENSERS & MATRIX	37-39	BACK BAR REFRIGERATION	77-80
WATER FILTRATION	40	ECONOMY SERIES	81-83
OZONE DEVICE & REMOTE MONITORING	41	REFRIGERATION ACCESSORIES	85-89

HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it. It's performing beyond expectations...with relentless durability and sustainability. It's knowing that we've already thought about your future and can endure at the next level.



HEADQUARTERS FOR THE AMERICAS

HOSHIZAKI AMERICA, INC., with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.



DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 13,180 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001
- being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by ENERGY STAR®.





WARRANTY

EFFECTIVE: April 1, 2021

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS: Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS: Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

KMEdge Series Cubers, DKM Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers

3-Year - Parts & Labor on entire machine & DB/DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

AM-50 Series Cubers & C-80 Flakers

2-Year - Parts & Labor on entire machine

DWM MODwater Water Dispensers

3-Year - Parts & Labor on entire machine

IM Series Cubers (Specialty Ice)

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Bins & Water Dispensers

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

Countertop Refrigerated Display Cases

1-Year - Parts & Labor on entire machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

Accessories

90 Day - Parts only

1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS



CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE
VERIFIE


Intertek

Intertek

Intertek



ICE MACHINE MODEL NUMBER IDENTIFICATION CODE

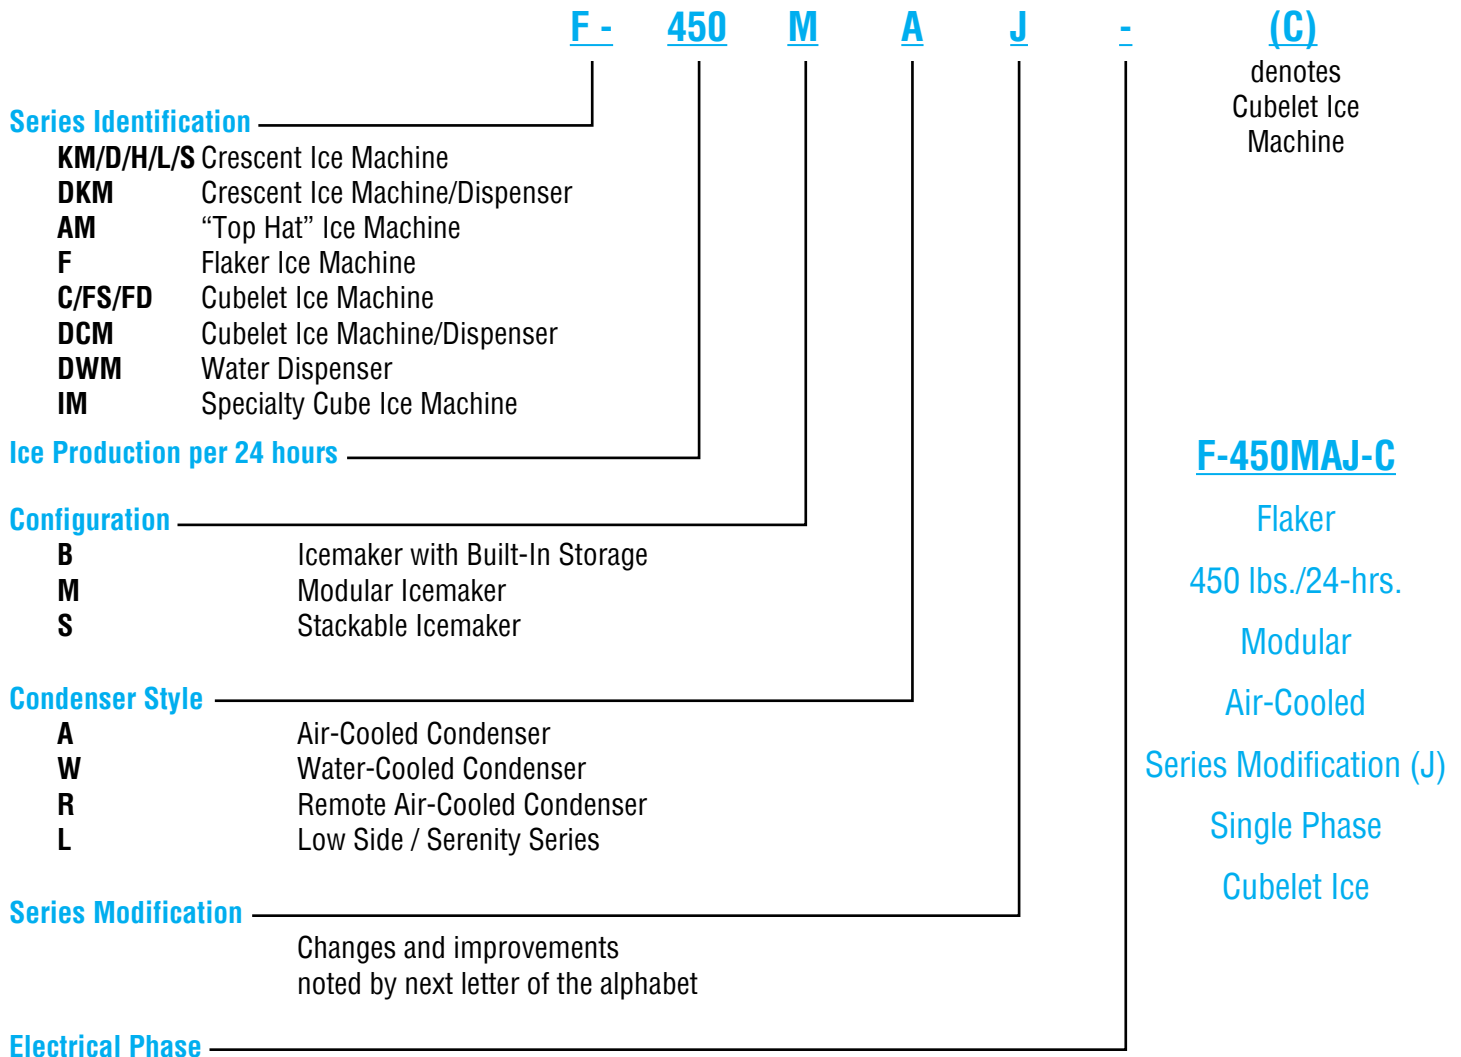

CHOOSING THE RIGHT ICE MAKER



HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need



Restaurants use an average of **2 lbs.** of ice per customer per day

Schools and university cafeterias average about **1.5 lbs.** of ice per student per day



Hospital cafeterias use about **1 lbs.** of ice per person per day and an average of **10 lbs.** for every bed

Bars and cocktail lounges use about **3 lbs.** of ice per seat



Hotels use about **5 lbs.** of ice per room per day

Pounds of ice used
X **Number of customers served**

= **The size of ice maker you need**

Your menu should dictate your machine
—not the other way around




TYPES OF ICE



Crescent Cube - Individual, hard, clear, crescent shape

Ice Equipment Models:


- KM KMD
- KML KMS
- KMH DKM models

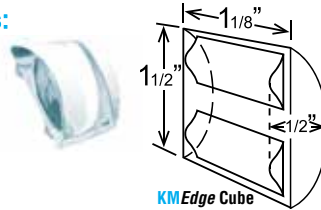

"Top Hat" Cube - Individual, hard, clear, round shape

Ice Equipment Models:


- AM models

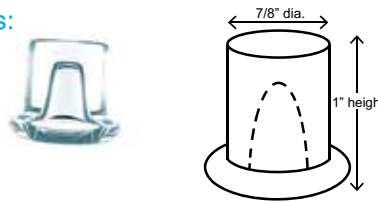

Cubelet - Chewable, soft, light, small nugget shape

Ice Equipment Models:

- C
- FD-C
- F-C
- FS-C
- DCM models

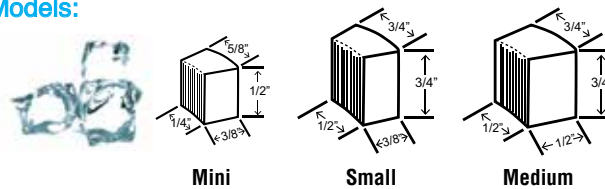

Flaked - Soft, light, chewable, various shapes

Ice Equipment Models:

- F models




SPECIALTY ICE

Ice Equipment Models: IM models




Square Cube

Individual, hard, clear, square shape



Sphere


1.8" in diameter, clear and solid





CUBER SERIES


Features & Benefits of the AM Cuber



- Attractive stainless steel finish
- Individual top-hat style cubers eliminates clumping and allow for easy filling of glass
- **AM Series Cubers** were designed with fewer moving parts, which contribute to its long life and dependability
- Compact size (less than 15 inches wide), undercounter design, swing style reversible door, and UL approval for outdoor use, expand the possibilities where this machine can be installed
- Front in and front out airflow allows unit to be built into cabinetry without additional ventilation
- Ice making compartment can be easily disassembled for cleaning
- Door system is designed to accommodate custom cabinetry
- ADA Compliant models available



Features & Benefits of the KM Cuber



KM|EDGE DESIGN



- Benefits include increased productivity and energy savings, even in harsh water conditions
- The **KMEdge Cuber Series** features an attractive stainless steel finish with the simplest ice making system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- HOSHIZAKI's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual, crystal clear crescent cubers
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack
- CycleSaver™ design allows production of the same amount of ice in half the cycles of other ice machines. Fewer moving parts and cycles means dependability, longer machine life and energy savings!
- EverCheck™ control board sounds an audible warning when service is needed
- Contains H-GUARD Plus® Antimicrobial Agent





CUBER Self-Contained

AM-50BAJ


Undercounter AM Cubers with Built-In Bins

Dimensions: 14 7/8" W X 22 5/8" D X 33 1/2" H
The ADA compliant machine dimensions are 14 7/8" W x 22 5/8" D x 31 1/2" H

Self-Contained Bin Storage Capacity Up to 22 Lbs.


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
AM-50BAJ	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	\$4,160
AM-50BAJ-DS†	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	\$4,320
AM-50BAJ-AD*	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	\$4,410
AM-50BAJ-ADDS†*	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	\$4,540

Accessories: **HS-0229** DS Door Reversal Part (*Order as a Service Part*)
HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$710
HS-0182 Side Trim Kit \$270
HS-2133 2" Top Spacer Kit available \$200
H9320-51 Recommended Water Filtration - Single Configuration \$420



UL approved for outdoor use
 †DS Models - Wood Door System (Designed to accommodate custom cabinetry)
 *ADA compliant

KM-81BAJ




Undercounter KMEdge Cuber with Built-In Bin

Dimensions: 17 3/4" W X 24" D X 39" H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 38 Lbs.†


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-81BAJ*	Air-Cooled	52	78	115V/60/1	8.45	125 Lbs.	\$3,730

Accessories: **HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$710
H9320-51 Recommended Water Filtration - Single Configuration \$420



†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.
 *ENERGY STAR qualified

KM-116BAJ




Undercounter KMEdge Cuber with Built-In Bin

Dimensions: 23 3/4" W X 24" D X 39" H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 53 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-116BAJ*	Air-Cooled	100	125	115V/60/1	8.1	146 Lbs.	\$4,200








Accessories: **HS-5061** Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$710
H9320-51 Recommended Water Filtration - Single Configuration \$420

















†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.
 *ENERGY STAR qualified



CUBER Self-Contained

		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>					
		Dimensions: 23 3/4" W X 28 1/4" D X 39" H (6" Legs Included)					Self-Contained Bin Storage Capacity Up to 78 Lbs.†
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.
KM-161BAJ	Air-Cooled	123	163	115V/60/1	8.6	159 Lbs.	\$4,620
KM-161BWJ	Water-Cooled	135	153	115V/60/1	6.5	163 Lbs.	\$4,880
Accessories: H9320-51 Recommended Water Filtration - Single Configuration							\$420
    							
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.							

		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>					
		Dimensions: 24" W X 28" D X 39" H (6" Legs Included)					Self-Contained Bin Storage Capacity Up to 80 Lbs.†
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.
KM-231BAJ	Air-Cooled	147	213	115V/60/1	8.4	165Lbs.	\$5,000
Accessories: H9320-51 Recommended Water Filtration - Single Configuration							\$420
    							
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.							


		<h2>Undercounter <i>KMEdge</i> Cuber with Built-In Bin</h2>					
		Dimensions: 30" W X 28" D X 39" H (6" Legs Included)					Self-Contained Bin Storage Capacity Up to 100 Lbs.†
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.
KM-301BAJ	Air-Cooled	212	290	115V/60/1	7.1	206 Lbs.	\$5,840
KM-301BWJ	Water-Cooled	237	285	115V/60/1	4.90	189 Lbs.	\$5,890
Accessories: H9320-51 Recommended Water Filtration - Single Configuration							\$420
    							
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.							











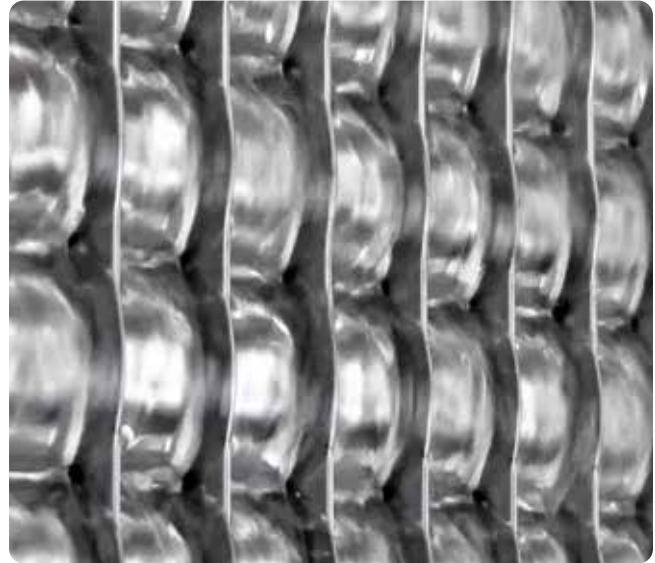


CUBER

KMEDGE X ICE MACHINE SERIES

- **Reliable operation** with stronger, more durable construction, less service parts, and increased ice production.
- **Easier installation** with a more compact footprint and factory installed ultrasonic bin control.
- **Simple maintenance** with new CleanAssist technology and redesigned float switch for one-hour cleaning.




		KMEdge X Series Cubers					
	Ice Machine Dimensions: 22"W X 27 ^{3/8} "D X 28"H						
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-350MAJ*	Air-Cooled	393	489	115V/60/1	5.4	175 Lbs.	\$5,940
KM-350MWJ	Water-Cooled	383	414	115V/60/1	4.9	175 Lbs.	\$5,960
Accessories:							
	H9320-51	Recommended Water Filtration - Single Configuration					\$420
	HS-5426	Tamper Proof Kit - Air Cooled Units					\$470
	HS-5427	Tamper Proof Kit - Water/Remote Units					\$470
   							
*ENERGY STAR qualified							
    							
22 x 32 1/2 x 74 30 x 32 1/2 x 74 44 x 32 1/2 x 74 48 x 32 1/2 x 74 52 x 32 1/2 x 74 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.							



CUBER



KM-520M_J



KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-520MAJ*	Air-Cooled	480	556	115V/60/1	4.7	175 Lbs.	\$6,470
KM-520MWJ	Water-Cooled	444	474	115V/60/1	4.7	175 Lbs.	\$6,470
KM-520MRJ*	Remote A-C	495	547	115V/60/1	4.8	175 Lbs.	\$6,370
Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-520MAJ-E*	Air Cooled	197	238	220-240V/50/1	4.9	68 Kg.	\$6,520


Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420
 HS-5426 Tamper Proof Kit - Air Cooled Units \$470
 HS-5427 Tamper Proof Kit - Water/Remote Units \$470



*Use URC-5F Condenser for Remote Air-Cooled Unit

"E" suffix designates 50 hertz model see spec sheet for certifications


*ENERGY STAR qualified

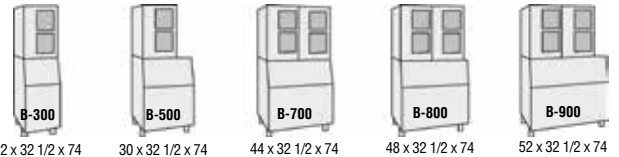

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



KM-660M_J



KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 28"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-660MAJ	Air-Cooled	617	665	115V/60/1	5.1	180 Lbs.	\$7,510
KM-660MWJ	Water-Cooled	668	669	115V/60/1	4.3	180 Lbs.	\$7,620
KM-660MRJ	Remote A-C	602	646	115V/60/1	5.6	180 Lbs.	\$7,410
Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-660MAJ-E	Air-Cooled	262	280	220-240V/50/1	4.9	68 Kg.	\$7,580

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420
 HS-5426 Tamper Proof Kit - Air Cooled Units \$470
 HS-5427 Tamper Proof Kit - Water/Remote Units \$470



Use URC-5F Condenser for Remote Air-Cooled Unit

"E" suffix designates 50 hertz model see spec sheet for certifications

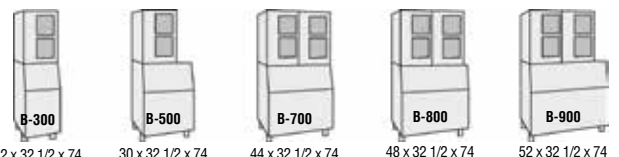



Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-901M_J









KMEdge Cubers





Ice Machine Dimensions: 30"W X 27 ³/₈"D X 32 ¹/₂"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-901MAJ	Air-Cooled	753	905	208-230V/60/1	5.0	260 Lbs.	\$9,730
KM-901MWJ	Water-Cooled	870	950	208-230V/60/1	3.6	250 Lbs.	\$9,950
KM-901MRJ*	Remote A-C	853	904	208-230V/60/1	4.5	250 Lbs.	\$9,620
KM-901MRJ3*	Remote A-C	830	927	208-230/60/3	4.4	250 Lbs.	\$9,950

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$710
HS-5245 Tamper Proof Kit - Air Cooled Units \$540
HS-5246 Tamper Proof Kit - Water/Remote Units \$540


Use URC-14F Condenser for Remote Air-Cooled Unit







30 x 32 1/2 x 78 1/2 44 x 32 1/2 x 78 1/2 48 x 32 1/2 x 78 1/2 52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1100M_J









KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 32 ¹/₂"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ	Air-Cooled	935	1087	208-230V/60/1	4.9	290 Lbs.	\$11,230
KM-1100MWJ	Water-Cooled	1006	1073	208-230V/60/1	4.0	280 Lbs.	\$11,350
KM-1100MRJ	Remote A-C	1030	1156	208-230V/60/1	4.5	272 Lbs.	\$11,230





Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ50	Air-Cooled	356	464	220-240V/50/1	5.7	136 Kg.	\$11,450

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$710
HS-5245 Tamper Proof Kit - Air Cooled Units \$540
HS-5246 Tamper Proof Kit - Water/Remote Units \$540

Use URC-14F Condenser for Remote Air-Cooled Unit

"E" suffix designates 50 hertz model
see spec sheet for certifications

30 x 32 1/2 x 78 1/2 44 x 32 1/2 x 78 1/2 48 x 32 1/2 x 78 1/2 52 x 32 1/2 x 78 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-1301S_J

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 3/8"D X 27 3/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ	Air-Cooled	1301	1365	208-230V/60/1	4.27	338 Lbs.	\$12,620
KM-1301SWJ	Water-Cooled	1230	1247	208-230V/60/1	3.76	335 Lbs.	\$12,720
KM-1301SRJ	Remote A-C	1260	1400	208-230V/60/1	4.28	339 Lbs.	\$12,510
KM-1301SAJ3*	Air-Cooled	1350	1427	208-230V/60/3	3.95	338 Lbs.	\$12,720
KM-1301SWJ3	Water-Cooled	1355	1360	208-230V/60/3	3.25	335 Lbs.	\$12,840
KM-1301SRJ3*	Remote A-C	1330	1433	208-230V/60/3	3.83	339 Lbs.	\$12,620

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ-E	Air-Cooled	501	624	220-240/50/1*	4.5	154 Kgs.	\$13,310

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$990
HS-5252 Tamper Proof Kit - Air Cooled Units \$600
HS-5253 Tamper Proof Kit - Water/Remote Units \$600

Use URC-14F Condenser for Remote Air-Cooled Unit
 "E" suffix designates 50 hertz model see spec for certifications
***ENERGY STAR qualified**

48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1340M_J

KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 3/8"D X 41 1/2"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1340MAJ	Air-Cooled	1089	1275	208-230V/60/1**	4.81	315 Lbs.	\$12,840
KM-1340MWJ	Water-Cooled	1280	1323	208-230V/60/1**	3.6	315 Lbs.	\$12,940
KM-1340MRJ	Remote A-C	1177	1371	208-230V/60/1**	4.54	289 Lbs.	\$12,720
KM-1340MRJ3*	Remote A-C	1266	1428	208-230V/60/3*	4.16	289 Lbs.	\$12,940

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$190
H9320-53 Recommended Water Filtration - Triple Configuration \$990


Use URC-14F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**

30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.




CUBER

KM-1601MRJ




KMEdge Cubers


Ice Machine Dimensions: 30"W X 27 ³/₈"D X 41 ⁵/₈"H




Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601MRJ	Remote A-C	1550	1594	208-230V/60/1**	4.35	316 Lbs.	\$15,100
KM-1601MRJ3	Remote A-C	1550	1653	208-230V/60/3	4.09	316 Lbs.	\$15,430


Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$190
H9320-53 Recommended Water Filtration - Triple Configuration \$990









Use URC-22F Condenser for Remote Air-Cooled Unit




B-500
30 x 32 1/2 x 87 1/2



B-700
44 x 32 1/2 x 87 1/2




B-800
48 x 32 1/2 x 87 1/2



B-900
52 x 32 1/2 x 87 1/2


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1601S_J




KMEdge Cubers


Ice Machine Dimensions: 48"W X 27 ³/₈"D X 27 ³/₈"H





Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601SAJ	Air-Cooled	1433	1513	208-230V/60/1**	4.24	345 Lbs.	\$14,940
KM-1601SWJ	Water-Cooled	1650	1660	208-230V/60/1**	3.30	335 Lbs.	\$14,980
KM-1601SRJ*	Remote A-C	1600	1640	208-230V/60/1**	3.96	315 Lbs.	\$14,860
KM-1601SAJ3	Air-Cooled	1414	1513	208-230V/60/3	4.40	350 Lbs.	\$15,050
KM-1601SWJ3	Water-Cooled	1660	1671	208-230V/60/3	3.32	345 Lbs.	\$15,080
KM-1601SRJ3	Remote A-C	1600	1635	208-230V/60/3	4.14	355 Lbs.	\$14,980

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$190
H9320-53 Recommended Water Filtration - Triple Configuration \$990
HS-5252 Tamper Proof Kit - Air Cooled Units \$600
HS-5253 Tamper Proof Kit - Water/Remote Units \$600











Use URC-22F Condenser for Remote Air-Cooled Unit


*ENERGY STAR qualified




B-800
48 x 32 1/2 x 73 3/8



B-800
48 x 32 1/2 x 101 3/4



B-900
52 x 32 1/2 x 73 3/8



B-900
52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-1900S_J

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 ³/₈"D X 36 ⁷/₁₆"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1900SAJ*	Air-Cooled	1675	1875	208-230V/60/1**	3.9	415 Lbs.	\$16,180
KM-1900SWJ	Water-Cooled	1875	1880	208-230V/60/1**	3.2	415 Lbs.	\$16,290
KM-1900SRJ*	Remote A-C	1700	1933	208-230V/60/1**	3.9	415 Lbs.	\$16,080
KM-1900SAJ3*	Air-Cooled	1675	1865	208-230V/60/3	3.9	415 Lbs.	\$16,290
KM-1900SWJ3	Water-Cooled	1875	1880	208-230V/60/3	3.2	415 Lbs.	\$16,400
KM-1900SRJ3*	Remote A-C	1700	1933	208-230V/60/3	3.9	415 Lbs.	\$16,180

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$190
H9320-53 Recommended Water Filtration - Triple Configuration \$990
HS-5254 Tamper Proof Kit - Air Cooled Units \$618
HS-5255 Tamper Proof Kit - Water/Remote Units \$618

Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**

48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-2200S_J3

KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 ³/₈"D X 36 ⁷/₁₆"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-2200SWJ3	Water-Cooled	2200	2221	208-230V/60/3	3.11	400 Lbs.	\$20,390
KM-2200SRJ3*	Remote A-C	2075	2206	208-230V/60/3	3.75	400 Lbs.	\$20,390

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$990
HS-5255 Tamper Proof Kit - Water/Remote Units \$618

Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**



48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-2600S_J3








KM Edge Cubers

Ice Machine Dimensions: 48"W X 27^{3/8}"D X 36^{7/16}"H





Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-2600SWJ3	Water-Cooled	2480	2482	208-230V/60/3	3.6	440 Lbs.	\$23,090
KM-2600SRJ3*	Remote A-C	2580	2617	208-230V/60/3	3.61	440 Lbs.	\$22,140

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$990
HS-5255 Tamper Proof Kit - Water/Remote Units \$618

Use URC-26J Condenser for Remote Air-Cooled Unit



*ENERGY STAR qualified

48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KMH-2100S_J








KM Edge Cubers

Ice Machine Dimensions: 36"W X 40"D X 36^{7/16}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMH-2100SWJ3	Water-Cooled	2000	2060	208-230V/60/3	2.92	415 Lbs.	\$19,200
KMH-2100SRJ*	Remote A-C	1850	2034	208-230V/60/1**	3.75	415 Lbs.	\$19,310
KMH-2100SRJ3*	Remote A-C	1925	2026	208-230V/60/3	3.67	415 Lbs.	\$19,420



Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$190
H9320-53 Recommended Water Filtration - Triple Configuration \$990

Use URC-22F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified

KMD-410M_J









KM Cubers

Ice Machine Dimensions: 22"W X 24"D X 24"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-410MAJ	Air-Cooled	351	418	115-120V/60/1	5.7	161 Lbs.	\$6,100
KMD-410MWJ	Water-Cooled	382	440	115-120V/60/1	4.3	163 Lbs.	\$6,370

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$420

22 x 30 1/2 x 35 3/8 22 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER Dispenser

KMD-460M_J

KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-460MAJ	Air-Cooled	400	440	115-120V/60/1	5.5	170 Lbs.	\$6,400
KMD-460MWJ	Water-Cooled	472	487	115-120V/60/1	4.1	170 Lbs.	\$6,510

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KMD-530M_J

KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-530MAJ	Air-Cooled	442	501	115V/60/1	5.7	170 Lbs.	\$6,710
KMD-530MWJ	Water-Cooled	500	515	115V/60/1	4.7	170 Lbs.	\$6,810
KMD-530MRJ	Remote A-C	440	498	115V/60/1	6.1	170 Lbs.	\$6,590

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420

22 x 30 1/2 x 34

30 x 32 1/2 x 68 1/8

Use URC-5F Condenser for Remote Air-Cooled Unit
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KMD-860M_J

KMEdge Cubers

Ice Machine Dimensions: 30"W X 24 5/8"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMD-860MAJ	Air-Cooled	665	855	208-230V/60/1	5.16	248 Lbs.	\$9,600
KMD-860MWJ	Water-Cooled	862	940	208-230V/60/1	3.90	258 Lbs.	\$9,700
KMD-860MRJ	Remote A-C	850	967	208-230V/60/1	5.05	256 Lbs.	\$9,480

Accessories: H9320-52 Recommended Water Filtration - Twin Configuration \$710

30 x 30 1/2 x 39 5/8

30 x 32 1/2 x 68 1/8

48 x 32 1/2 x 74


Use URC-9F Condenser for Remote Air-Cooled Unit
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER Low Profile



KML-325M_J



Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-325MAJ	Air-Cooled	300	380	115V/60/1	5.72	185 Lbs.	\$5,490
KML-325MWJ	Water-Cooled	355	385	115V/60/1	4.51	185 Lbs.	\$5,610

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420



30 x 32 1/2 x 55 3/8



30 x 32 1/2 x 68




30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



KML-500M_J



Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-500MAJ	Air-Cooled	400	442	115V/60/1	5.55	185 Lbs.	\$6,350
KML-500MWJ	Water-Cooled	515	543	115V/60/1	4.33	185 Lbs.	\$6,460

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420



30 x 32 1/2 x 55 3/8



30 x 32 1/2 x 68




30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



KML-700M_J



Low Profile *KMEdge* Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-700MAJ*	Air-Cooled	572	658	115V/60/1	4.90	204 Lbs.	\$7,770
KML-700MWJ	Water-Cooled	730	756	115V/60/1	3.79	202 Lbs.	\$7,870
KML-700MRJ*	Remote A-C	643	742	115V/60/1	4.90	200 Lbs.	\$7,650

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420



Use URC-9F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified



30 x 32 1/2 x 59 3/8



30 x 32 1/2 x 72















30 x 30 x 79

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER Serenity Series


		KMEdge Cuber						
		Ice Machine Dimensions: 22"W X 24 5/8"D X 28"H						
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight
KMS-822MLJ using 1 Phase Remote Condenser	Remote A-C	770	851	115V/60/1 *	5.3	150 Lbs.	\$8,650	
Accessories: HS-5062 Extension bracket for Freestyle application \$160 H9320-52 Recommended Water Filtration - Twin Configuration \$710								
  		Designed for use on beverage dispensers Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately) *115V supply for the KMS Ice maker is supplied from the SRK remote condenser				 IBD 4500 22" 22 x 30 1/2 x 35 3/8		
						See TOP KIT MATRIX (pg 35) for top kit options based on bin size.		

		KMEdge Cuber						
		Ice Machine Dimensions: 22"W X 18 1/8"D X 31 1/4"H						
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight
KMS-1122MLJ using 1 Phase Remote Condenser	Remote A-C	1075	1151	115V/60/1 *	4.2	152 Lbs.	\$9,210	
KMS-1122MLJ using 3 Phase Remote Condenser	Remote A-C	1100	1151	115V/60/3 *	4.05	152 Lbs.	\$9,210	
Accessories: H9320-52 Recommended Water Filtration - Twin Configuration \$710								
  		Designed for use on beverage dispensers Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately) *115V supply for the KMS Ice maker is supplied from the SRK remote condenser				 Lancer FS22 22 x 30 1/2 x 40 1/4		



CUBER Serenity Series

KMS-1402MLJ




KMEdge Cuber


Ice Machine Dimensions: 30"W X 24"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-1402MLJ <small>using 1 Phase Remote Condenser</small>	Remote A-C	1400	1501	115V/60/1*	4.3	178 Lbs.	\$9,230
KMS-1402MLJ <small>using 3 Phase Remote Condenser</small>	Remote A-C	1325	1474	115V/60/3*	4.55	178 Lbs.	\$9,230

Accessories: H9320-52 Recommended Water Filtration - Twin Configuration \$710




Designed for use on beverage dispensers.
Use SRK-15J or SRK-15J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser




Lancer FS30
30 x 30 1/2 x 39 5/8

See TOP KIT MATRIX (pg 35) for top kit options based on bin size.



KMS-2000MLJ




KMEdge Cuber


Ice Machine Dimensions: 30"W X 24"D X 32^{7/8}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-2000MLJ <small>using 1 Phase Remote Condenser</small>	Remote A-C	1850	1926	208-230V/60/1*	4.50	206 Lbs.	\$11,420
KMS-2000MLJ <small>using 3 Phase Remote Condenser</small>	Remote A-C	1900	1938	208-230V/60/3*	4.30	206 Lbs.	\$11,420

Accessories: H9320-53 Recommended Water Filtration - Triple Configuration \$990




Designed for use on beverage dispensers.
Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)
*208-230V supply for the KMS Ice maker is supplied from the SRK remote condenser



Lancer FS30
30 x 30 1/2 x 39 5/8


See TOP KIT MATRIX (pg 35) for top kit options based on bin size.
























SPECIALTY ICE

Features & Benefits of the IM Square Cuber



- **HOSHIZAKI IM Square Cubers** utilize an ice making system that has an automatic rinse cycle, which means each ice cycle is made with fresh water protecting the integrity and flavor of the drink.
- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- A stainless steel exterior with integrated door handles provides a hygienic and high quality finish (Self contained unit only)
- Removable door gaskets prevent any heat and contamination from entering the bin making the product easy to clean and maintain. (Self contained unit only)
- Easily cleanable air filter extends the life of the ice machine
- **HOSHIZAKI IM Square Cubers** are electronically controlled for consistent quality of ice
- Natural foaming agent insulates the bin and preserves the quality and consistency of the ice produced longer than any other machine available - saving energy and money

IM-200BAC	IM Square Cuber with Built-In Bin								
	Dimensions: 39 1/2"W X 23 5/8"D X 33 1/2"H (including 6" legs)						Self-Contained Bin Storage Capacity Up to 75 Lbs. †		
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		IM-200BAC	Air-Cooled	150	188	115V/60/1	8.4	212 lbs.	\$6,870
	Accessories: H9320-51 Recommended Water Filtration - Single Configuration								\$420
   									
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.									

IM-500SAB	IM Square Cuber								
	Ice Machine Dimensions: 44"W X 27 5/8"D X 21 3/4"H								
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		IM-500SAB	Air-Cooled	414	489	115V/60/1	5.8	234 Lbs.	\$8,680
	Accessories: HS-5530 Stacking Kit (Order as Accessory)								\$590
H9320-51 Recommended Water Filtration - Single Configuration								\$420	
   									
      									
44 x 32 1/2 x 67 3/4 44 x 32 1/2 x 89 1/2 48 x 32 1/2 x 67 3/4 48 x 32 1/2 x 89 1/2 52 x 32 1/2 x 67 3/4 52 x 32 1/2 x 89 1/2 60 x 41 x 103 1/2									
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.									








SPECIALTY ICE

Features & Benefits of the IM-50BAA-Q, Sphere Cuber Icemaker

- **HOSHIZAKI Sphere Ice Machine** is the only machine on the market to make sphere ice. Spheres are 1.8" in diameter, clear and solid.
- Cubes have superior chilling ability and beautiful appearance
- Small footprint can easily fit under bar counter
- Up to 50 lbs. (500 spheres) of ice production per 24 hours
- Built-in storage bin with 36 lb. capacity
- Durable stainless steel exterior
- Easy to clean air filter
- Foam injected polyurethane for insulation (HFC free)
- Closed water circuit offers the ultimate contamination protection
- Ice scoop included
- 6.5' power cord with NEMA 5-15P plug




IM-50BAA-Q		Sphere Ice Machine with Built-In Bin							
		Ice Machine Dimensions: 24 ^{3/4} " x 20 ^{3/4} " x 39 ^{1/2} "							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		IM-50BAA-Q	Air-Cooled	45	50	115V/60/1	15.7	150 Lbs.	\$10,900
  		<p style="text-align: center;">Sphere Ice Dimensions</p> 							
<p>Removable/cleanable air filter Panels easily removed and all components accessible for service.</p>									




FLAKER Self-Contained

Features & Benefits of the Flaker / Cubelet Series

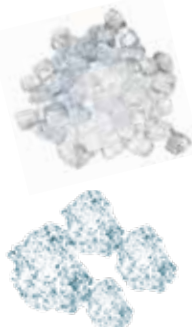


- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet (nugget-style) ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **HOSHIZAKI Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Advanced CleanCycle24™ design - 2 second rinse every hour
- Infrared bin control is standard and factory installed

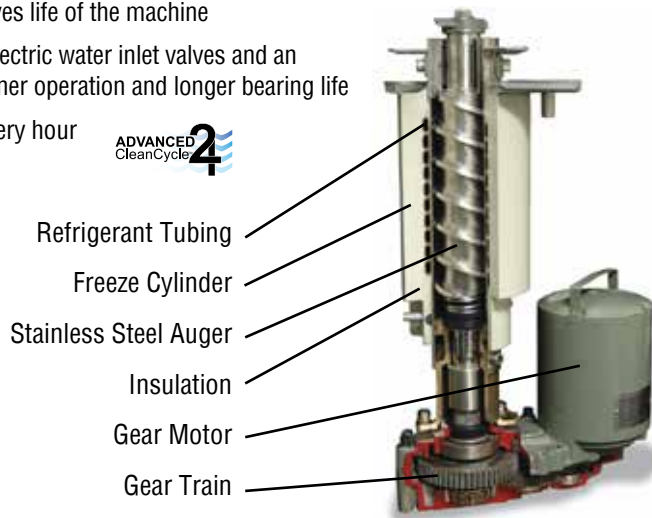

FLAKED ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft ³
Hospital	
Patient Care	10 lbs. ice per bed
Cafeteria	1 lb. ice per seat
Nursing Home	6 lbs. per bed

F-300BAJ



Undercounter FLAKER with Built-In Bin

Dimensions: 36"W X 24 1/4"D X 39 1/4"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 110 Lbs. †

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-300BAJ	Air-Cooled	247	353	115V/60/1	6.14	221 Lbs.	\$8,940


Accessories: LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$240
 H9320-51 Recommended Water Filtration - Single Configuration \$420



Four 6" Legs Package (LP-6P LEG) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-330BAJ



Undercounter FLAKER with Built-In Bin

Dimensions: 24"W X 26"D X 39"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 80 Lbs. †

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-330BAJ	Air-Cooled	243	332	115V/60/1	5.91	178 Lbs.	\$8,520

Accessories: LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$240
 H9320-51 Recommended Water Filtration - Single Configuration \$420



Four 6" Legs Package (LP-6P LEG) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



FLAKER

F-500BAJ

Undercounter FLAKER with Built-In Bin

Dimensions: 38"W X 29"D X 42"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 170 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-500BAJ	Air-Cooled	420	536	115V/60/1	5.05	265 Lbs.	\$10,570

Accessories: **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$240
H9320-51 Recommended Water Filtration - Single Configuration \$420

Four 6" Legs Package (**LP-6P LEG**) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-450MAJ

FLAKER

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-450MAJ*	Air-Cooled	395	492	115V/60/1	4.94	170 Lbs.	\$7,670

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$420

*Not recommended for dispensing applications

B-250
30 x 32 1/2 x 55 3/8

B-300
22 x 32 1/2 x 68

B-500
30 x 32 1/2 x 68

B-700
44 x 32 1/2 x 68

B-800
48 x 32 1/2 x 68

B-900
52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-801M_J

FLAKERS

Ice Machine Dimensions: 22"W X 27^{3/8}"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ*	Air-Cooled	566	751	115V/60/1	4.5	205 Lbs.	\$9,810
F-801MWJ	Water-Cooled	605	680	115V/60/1	3.9	205 Lbs.	\$9,920

Accessories: **HS-2120** Cutter head for finer flaked ice \$210
H9320-51 Recommended Water Filtration - Single Configuration \$420

*ENERGY STAR qualified

B-250
30 x 32 1/2 x 59 3/8

B-300
22 x 32 1/2 x 72

B-500
30 x 32 1/2 x 72

B-700
44 x 32 1/2 x 72

B-800
48 x 32 1/2 x 72

B-900
52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



FLAKER

F-1002M_J

FLAKERS

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1002MAJ	Air-Cooled	758	980	115V/60/1	4.36	210 Lbs.	\$12,080
F-1002MWJ	Water-Cooled	833	955	115V/60/1	3.57	205 Lbs.	\$12,190
F-1002MRJ	Remote A-C	744	864	115V/60/1	5.1	210 Lbs.	\$11,970
F-1002MLJ	N/A	797	1028	115V/60/1	1.51	205 Lbs.	\$11,860

Accessories: **HS-2120** Cutter head for finer flaked ice \$210
H9320-51 Recommended Water Filtration - Single Configuration \$420

Use URC-5F Condenser for Remote Air-Cooled Unit

22 x 32 1/2 x 71 15/16 30 x 32 1/2 x 71 15/16 44 x 32 1/2 x 71 15/16 48 x 32 1/2 x 71 15/16 52 x 32 1/2 x 71 15/16

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-1501M_J

FLAKERS

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 34 ^{7/16}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1501MAJ	Air-Cooled	1154	1543	208-230V/60/1**	4.0	325 Lbs.	\$15,360
F-1501MWJ	Water-Cooled	1250	1431	208-230V/60/1**	3.55	350 Lbs.	\$15,470
F-1501MRJ	Remote A-C	1140	1496	208-230V/60/1**	4.40	325 Lbs.	\$15,250

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$420

Use URC-14F Condenser for Remote Air-Cooled Unit

30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-2001M_J

FLAKERS

Ice Machine Dimensions: 30"W X 27 ^{1/2}"D X 34 ^{7/16}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-2001MWJ	Water-Cooled	1840	2043	208-230V/60/1**	3.19	342 Lbs.	\$20,950
F-2001MRJ	Remote A-C	1660	2073	208-230V/60/1**	3.81	360 Lbs.	\$20,840
F-2001MRJ3	Remote A-C	1675	2098	208-230V/60/3*	3.90	360 Lbs.	\$20,950
F-2001MLJ	N/A	1733	2280	115V/60/1	0.6	250 Lbs.	\$19,420

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$420

Use URC-22F Condenser for Remote Air-Cooled Unit


30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBELET Self Contained


C-80BAJ



-DS shown with Custom Cabinetry


Mini		Undercounter CUBELET with Built-In Bin					
		Dimensions: 14 7/8" W X 22 5/8" D X 33 1/2" H The ADA compliant machine dimensions are 14 7/8" W x 22 5/8" D x 31 1/2" H				Self-Contained Bin Storage Capacity Up to 22 Lbs.	
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
C-80BAJ	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,220
C-80BAJ-DS†	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,390
C-80BAJ-AD*	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,230
C-80BAJ-ADDS*†	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,540
Accessories:							
HS-0229		-DS Door Reversal Part (Available as a Service Part)					
HS-5061		Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor					\$710
HS-0182		Side Trim Kit					\$270
HS-2133		2" Top Spacer Kit available					\$200
H9320-51		Recommended Water Filtration - Single Configuration					\$420
UL approved for outdoor use							
†-DS Models - Wood Door System (Designed to accommodate custom cabinetry)							
*ADA compliant							

F-330BAJ-C



Mini		Undercounter CUBELET with Built-In Bin					Self-Contained Bin Storage Capacity Up to 80 Lbs.†	
		Dimensions: 24" W X 26" D X 39" H (6" Legs Included)						
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin	
F-330BAJ-C	Air-Cooled	214	288	115V/60/1	7.3	178 Lbs.	\$8,630	
Accessories:								
LP-6 LEG		Four 6" Stainless Steel Legs Package available (optional)					\$240	
H9320-51		Recommended Water Filtration - Single Configuration					\$420	
Four 6" Legs Package (LP-6P LEG) included								
†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.								

F-450MAJ-C



Mini		CUBELET					
		Ice Machine Dimensions: 22" W X 27 3/8" D X 22" H					
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-450MAJ-C*	Air-Cooled	316	412	115V/60/1	6.10	170 Lbs.	\$7,850
Accessories:							
H9320-51		Recommended Water Filtration - Single Configuration					\$420
*Not recommended for dispensing applications							
30 x 32 1/2 x 55 3/8 22 x 32 1/2 x 68 30 x 32 1/2 x 68 44 x 32 1/2 x 68 48 x 32 1/2 x 68 52 x 32 1/2 x 68 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.							



CUBELET

F-801M_J-C

CUBELET

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ-C*	Air-Cooled	532	690	115V/60/1	5.00	205 Lbs.	\$10,350
F-801MWJ-C	Water-Cooled	580	632	115V/60/1	4.13	205 Lbs.	\$10,250

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420

*ENERGY STAR qualified

30 x 32 1/2 x 59 3/8 22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-1002M_J-C

CUBELET

Ice Machine Dimensions: 22"W X 27 ^{3/8}"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1002MAJ-C	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	\$12,080
F-1002MWJ-C	Water-Cooled	878	770	115V/60/1	3.8	205 Lbs.	\$12,190
F-1002MRJ-C	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	\$12,500

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420

Use URC-5F Condenser for Remote Air-Cooled Unit

22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-1501M_J-C

CUBELET

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 34 ^{7/16}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1501MAJ-C	Air-Cooled	1020	1327	208-230V/60/1**	4.61	325 Lbs.	\$15,660
F-1501MWJ-C	Water-Cooled	1218	1376	208-230V/60/1**	3.76	330 Lbs.	\$15,760
F-1501MRJ-C	Remote A-C	1125	1335	208-230V/60/1**	4.35	325 Lbs.	\$15,540

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420


Use URC-14F Condenser for Remote Air-Cooled Unit


30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4
 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBELET

F-2001MRJ-C








Medium

CUBELET





Ice Machine Dimensions: 30"W x 27 1/2"D x 34 7/16"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	KWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-2001MRJ-C	Remote A-C	1500	1832	208-230V/60/1**	4.35	345 Lbs.	\$21,350

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420


Use URC-22F Condenser for Remote Air-Cooled Unit







30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

FD-650M_J-C









Small

CUBELET

Ice Machine Dimensions: 22"W X 24"D X 26"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	KWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
FD-650MAJ-C	Air-Cooled	495	634	115V/60/1	5.5	185 Lbs.	\$9,470
FD-650MWJ-C	Water-Cooled	520	622	115V/60/1	4.02	185 Lbs.	\$9,590
FD-650MRJ-C*	Remote A-C	470	588	115V/60/1	4.95	185 Lbs.	\$9,370

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420







Use URC-5F Condenser for Remote Air-Cooled Unit

***ENERGY STAR qualified**




Lancer SENSATION
30 x 31 x 37 1/4




BD-300
22 x 24 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

FD-1002M_J-C








Small

CUBELET


Ice Machine Dimensions: 22"W X 24"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	KWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
FD-1002MAJ-C	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	\$12,610
FD-1002MRJ-C	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	\$12,620


Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420

Use URC-5F Condenser for Remote Air-Cooled Unit



Lancer SENSATION
30 x 31 x 37 1/4



BD-300
22 x 24 x 72


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

26



CUBELET Serenity Series

FS-1001MLJ-C




CUBELET


Ice Machine Dimensions: 30"W X 11"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1001MLJ-C	Remote A-C	720 851	115V/60/1	5.07 4.29	166 Lbs.	\$11,300

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420




Use SRC-10J Condenser for Remote Air-Cooled Unit



Lancer SENSATION
30 x 31 x 37 1/4

FS-1022MLJ-C




CUBELET


Ice Machine Dimensions: 22"W X 16 1/2"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1022MLJ-C	Remote A-C	730 889	115V/60/1	5.10 3.93	150 Lbs.	\$12,840

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420




Use SRC-10J Condenser for Remote Air-Cooled Unit



Lancer SENSATION
30 x 31 x 37 1/4

FS-1501MLJ-C




CUBELET


Ice Machine Dimensions: 30"W X 16 1/2"D X 34 1/4"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1501MLJ-C	Remote A-C	1125 1386	115V/60/1	4.75 3.67	229 Lbs.	\$13,780

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$420



Use SRC-14J Condenser for Remote Air-Cooled Unit



Lancer SENSATION
30 x 31 x 37 1/4



DISPENSER

Features & Benefits of HOSHIZAKI Dispensers

- Attractive stainless steel exterior provides long life and easy maintenance
- **KMEdge** dispensers feature a built-in insulated storage bin
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- **DKM Hotel Dispenser** features the industry's only one-piece design and is 35% quieter than other hotel dispensers
- **DB Series** accommodates **KMEdge Series** Cubers
- **DCM Series** dispenses easy to chew cubelet ice and water
- **DWM Water Dispenser** offers four water choices in a small footprint
- HOSHIZAKI's **DCM Opti-Serve™ Series** offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity

DCM-271BAH		CUBELET Ice & Water Dispenser						
		Ice Machine/Dispenser Dimensions: 16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)				Ice Bin Storage Capacity Up to 10 Lbs.†		
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	DCM-271BAH	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$8,270
Accessories:		LP-4 LEG Four 4" Stainless Steel Legs Package available (optional) \$220 SD-271 Equipment Stand \$1,390 HS-2070 Seismic Wall Mount Kit \$200 HS-2104 Wall Mount Kit \$900 H9320-51 Recommended Water Filtration - Single Configuration \$420						
		Four 4" Legs included †Rated in accordance with AHRM Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.						
		Floor Model with Optional Stand 16 9/16 x 24 1/8 x 66 7/8 W x D x H		Counter-Top with 4" Legs 16 9/16 x 24 1/8 x 31 11/16 W x D x H				
NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.								

DCM-300BAH		CUBELET Ice & Water Dispenser						
		Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H				Ice Bin Storage Capacity Up to 40 Lbs.†		
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	DCM-300BAH	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$10,680
Accessories:		LP-6P LEG Four 6" Painted Legs Package available \$230 LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 SD-500 Equipment Stand \$1,510 Leg Kits: HS-2066 Seismic Wall Mount Kit \$210 HS-2071 Leg Seismic Kit \$530 H9320-51 Recommended Water Filtration - Single Configuration \$420						
		Unit supplied without legs †Rated in accordance with AHRM Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.						
		Counter-Top 26 x 22 1/2 x 40 W x D x H		Counter-Top with Optional 6" Legs 26 x 22 1/2 x 46 W x D x H		Floor Model with Optional Stand 26 x 22 1/2 x 72 1/2 W x D x H		



DISPENSER

DCM-500B_H

CUBELET Ice & Water Dispenser

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin
DCM-500BAH	Air-Cooled	450	618	115V/60/1	5.62	255 Lbs.	\$13,570
DCM-500BWH	Water-Cooled	512	590	115V/60/1	4.48	255 Lbs.	\$13,680

Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$230
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$240
- SD-500** Equipment Stand \$1,510
- Leg Kits: **HS-2066** Seismic Wall Mount Kit \$210
- HS-2071** Leg Seismic Kit \$530
- H9320-51** Recommended Water Filtration - Single Configuration \$420

Counter-Top
26 x 22 1/2 x 40
W x D x H

Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H

Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs
 †Rated in accordance with AHRI Standard 820(I-P).
 Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-75_B_H

CUBELET Ice & Water Dispenser

Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin
DCM-752BAH	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	\$17,750
DCM-751BWH	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	\$17,750

Accessories:

- LP-6P LEG** Four 6" Painted Legs Package available \$230
- LP-6 LEG** Four 6" Stainless Steel Legs Package available \$240
- SD-750** Equipment Stand \$1,900
- Leg Kits: **HS-2067** Seismic Wall Mount Kit \$260
- HS-2072** Leg Seismic Kit \$480
- H9320-51** Recommended Water Filtration - Single Configuration \$420

Counter-Top
34 1/16 x 28 1/2 x 48 1/16
W x D x H

Counter-Top
with Optional 6" Legs
34 1/16 x 28 1/2 x 54 1/16
W x D x H

Floor Model
with Optional Stand
34 1/16 x 28 1/2 x 80 1/2
W x D x H

Unit supplied without legs
 †Rated in accordance with AHRI Standard 820(I-P).
 Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-271BAH-OS

CUBELET Ice & Water Dispenser

(OptiServe TOUCHLESS ICE & WATER)

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 16 5/8"W X 24 1/4"D X 31 3/4"H
(4" Legs Included)

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F. O. B. Griffin
DCM-271BAH-OS	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$8,370

Accessories:

- LP-4 LEG** Four 4" Stainless Steel Legs Package available \$220
- SD-271** Equipment Stand \$1,390
- HS-2070** Seismic Wall Mount Kit \$200
- HS-2104** Wall Mount Kit \$900
- H9320-51** Recommended Water Filtration - Single Configuration \$420

Floor Model
with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H

Counter-Top
with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H

Four 4" Legs included
 †Rated in accordance with AHRI Standard 820(I-P).
 Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DISPENSER

DCM-300BAH-OS



CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Ice Bin Storage Capacity
Up to 40 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-300BAH-OS	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$10,780

Accessories: LP-6P LEG Four 6" Painted Legs Package available \$230
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$240
 SD-500 Equipment Stand \$1,510
 Leg Kits: HS-2066 Seismic Wall Mount Kit \$210
 HS-2071 Leg Seismic Kit \$530
 H9320-51 Recommended Water Filtration - Single Configuration \$420



Unit supplied without legs

†Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DCM-500B_H-OS



CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Ice Bin Storage Capacity
Up to 40 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH-OS	Air-Cooled	450	618	115V/60/1	5.62	276 Lbs.	\$13,680
DCM-500BWH-OS	Water-Cooled	512	590	115V/60/1	4.48	255 Lbs.	\$13,780

Accessories: LP-6P LEG Four 6" Painted Legs Package available \$230
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$240
 SD-500 Equipment Stand \$1,510
 Leg Kits: HS-2066 Seismic Wall Mount Kit \$210
 HS-2071 Leg Seismic Kit \$530
 H9320-51 Recommended Water Filtration - Single Configuration \$420



Unit supplied without legs

†Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DCM-75_B_H-OS



CUBELET Ice & Water Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H

Ice Bin Storage Capacity
Up to 95 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH-OS	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	\$17,860
DCM-751BWH-OS	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	\$17,860

Accessories: LP-6P LEG Four 6" Painted Legs Package available \$230
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$240
 SD-750 Equipment Stand \$1,900
 Leg Kits: HS-2067 Seismic Wall Mount Kit \$260
 HS-2072 Leg Seismic Kit \$480
 H9320-51 Recommended Water Filtration - Single Configuration \$420



Unit supplied without legs

†Rated in accordance with AHRI Standard 820(I-P).


Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.






DISPENSER

DB-130H








KMEdge DB Dispenser


Dispenser Dimensions: 22"W X 30"D X 53"H (6" Legs Included)

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DB-130H	130 Lbs.	20 lbs. / min.	115V/60/1	N/A	195 Lbs.	\$5,930


Accessories: LP-6 FLANGE LEG Four 6" Stainless Steel Legs Package available \$290
 HS-2109 Chute & grill replacement kit \$360

Intertek




22 x 30 x 53
W x D x H




KM-350/520/660M
Cuber
sold separately
22 x 30 x 81
W x D x H

Four Painted 6" Flange Legs included
 Note: 90 Day Warranty on accessory parts
 Ice dispensing area is ADA compliant
 Only dispenses crescent ice

DB-200H








KMEdge DB Dispenser


Dispenser Dimensions: 30"W X 30"D X 53"H (6" Legs Included)

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DB-200H	200 Lbs.	13 lbs. / min.	115V/60/1	N/A	220 Lbs.	\$6,810


Accessories: HS-2036 Top Kit for KM-350M, KM-520M or KM-660M \$220
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$240
 HS-2109 Chute & grill replacement kit \$360


Intertek



30 x 30 x 53
W x D x H




KML-325/500
Cuber
sold separately
30 x 30 x 75
W x D x H




KML-700
Cuber
sold separately
30 x 30 x 79
W x D x H

Four Painted 6" Legs included
 Note: 90 Day Warranty on accessory parts
 Ice dispensing area is ADA compliant
 Only dispenses crescent ice

DKM-500B_J










KMEdge DKM Dispenser

Ice Machine/Dispenser Dimensions: 30"W X 28"D X 77"H (6" Legs Included)

Model Number	Lbs. of Ice per 24 hours 70°A / 50°W	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DKM-500BAJ*	545 Lbs.	200 Lbs.	13 lbs. / min.	115V/60/1	5.56	300 Lbs.	\$13,590
DKM-500BWJ	540 Lbs.	200 Lbs.	13 lbs. / min.	115V/60/1	4.79	310 Lbs.	\$13,700

Accessories: HS-3586 6" Casters - Set of 4 \$500
 H9320-51 Recommended Water Filtration - Single Configuration \$420


Rated in accordance with
 AHRI Standard 80


Four Painted 6" Flange Legs included
 DKM-500B - Ice dispensing area is ADA compliant
 *ENERGY STAR qualified



DISPENSER

DM-200B








KMEdge Ice & Water Dispenser


Dispenser Dimensions: 30"W X 28"D X 36 3/8"H

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DM-200B	200 lbs.	7.5 lbs. / min.	115-120V/60/1	N/A	N/A	210 Lbs.	\$7,010


Accessories: **HS-2036** Top Kit for KM-350M, KM-520M or KM-660M \$220
DM Legs Four 4" Black Die Cast Legs Kit \$190
SD-200 Equipment Stand \$1,880

Unit supplied without legs
Only dispenses crescent ice





Counter-Top
30 x 28 x 36 3/8
W x D x H



Counter-Top
with optional 4" legs
30 x 28 x 40 3/8
W x D x H

DM-4420N








CUBELET Ice & Water Dispenser

Dimensions: 22"W X 30 1/2"D X 40"H

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DM-4420N	200 lbs.	N/A	115-120V/60/1	N/A	N/A	235 Lbs.	\$7,150


Accessories: **HS-5329** Top Kit for for FS-1022MLJ-C \$150
HS-5330 Top Kit for for FD-650M_J-C & FD-1002M_J-C \$430






Intertek

CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE VERIFIEE

DWM-20A








MODwater Water Dispenser

Dimensions: 14 7/8"W x 21 3/8"D x 16 5/8"H

Model Number	Max Draw of Chilled Water (Chilled or Sparkling)	Max Flow Rate (Chilled)	Heat Rejection	Refrigerant Type/Charge	Max. Fuse Size or HACR Circuit Breaker	Max Amps	Voltage	Shipping Weight	List F.O.B. Griffin
DWM-20A	20 gal/hour	0.9 gal/min	450W	R-134a/ 4.23 oz	15A	9A	120V/60/1	90 Lbs.	\$6,500

Accessories: **HS-5441** Replacement All-in-One Filter Cartridge, HS-5441 (pack of 2) \$325
HS-5442 Replacement Alkaline Chamber \$335
HS-5504 6-Month Replacement Kit: Filters (2 ea.) alkaline chamber, air filter, nozzle tip w/aerator \$675
HS-5542 DWM Top Kit for SD-271 \$180

Installation kit included
CO₂ tank must be sourced from other vendor

TYPES OF WATER DISPENSED




	Temp.	
Chilled	34°-36°F	
Sparkling	Carbonation	3.7 Vol.
Alkaline	pH (avg.)	8.0-9.0
Hot	Factory set	185°F



ICE STORAGE BINS


HOSHIZAKI Ice Storage Bins are available with either stainless steel or vinyl clad exterior for easy cleaning and long lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop (included).





B-250PF		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-250PF	Vinyl Clad	250 Lbs.	30" x 32 ^{1/2} " x 33 ^{3/8} "	110 Lbs.	\$1,900	
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$240 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations						
B-300SF BD-300SF**		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-300SF	Stainless Steel	300 Lbs.	22" x 32 ^{1/2} " x 46"	125 Lbs.	\$2,010	
	Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$290 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Flanged Legs included Refer to Top Kit Matrix for necessary configurations						
	BD-300SF	Stainless Steel	300 Lbs.	22" x 32 ^{1/2} " x 46"	135 Lbs.	\$2,050	
	Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$290 SP-5429 Bin Door Catch \$48.77 For use with KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension						
B-500SF BD-500SF**		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-500SF	Stainless Steel	500 Lbs.	30" x 32 ^{1/2} " x 46"	140 Lbs.	\$2,240	
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$240 HS-2129 Top Kit: KMD application \$290 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations						
	BD-500SF	Stainless Steel	500 Lbs.	30" x 32 ^{1/2} " x 46"	155 Lbs.	\$2,300	
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 For use with KMD-460M, KMD-530M, KMD-860M **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension Four 6" Painted Legs included						





ICE STORAGE BINS

B-700SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-700SF	Stainless Steel	700 Lbs.	44" x 32 ^{1/2} " x 46"	175 Lbs.	\$2,870
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 HS-2035 Order 22" Top Kit to accommodate 22"W ice machines \$260 HS-2034 Order 14" Top Kit to accommodate 30"W ice machines \$240 HS-2130 Top Kit: KMD application \$340 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					

B-800SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-800SF	Stainless Steel	800 Lbs.	48" x 32 ^{1/2} " x 46"	185 Lbs.	\$3,100
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 HS-2035 22" Top Kit & HS-2032 - 4" Top Kit to accommodate 22"W ice machines \$480 HS-2032 4" Top Kit to accommodate (2) 22"W ice machines \$220 HS-2034 Order 14" Top Kit & HS-2032 - 4" Top Kit to accommodate 30"W machines \$460 HS-2131 Top Kit: KMD application \$400 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					

B-900SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-900SF	Stainless Steel	900 Lbs.	52" x 32 ^{1/2} " x 46"	195 Lbs.	\$3,310
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$240 HS-2035 Order 22" Top Kit to accommodate 30"W ice machines \$260 HS-2035 22" Top Kit & HS-2033 - 8" Top Kit to accommodate 22"W ice machines \$500 HS-2033 8" Top Kit to accommodate (2) 22"W machines \$240 HS-2032 4" Top Kit to accommodate 48"W ice machines \$220 HS-2132 Top Kit: KMD application \$490 SP-5429 Bin Door Catch \$48.77 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					


B-1150SS / B-1300SS	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-1150SS	Stainless Steel	1148 Lbs.	48" x 41" x 60"	315 Lbs.	\$6,570
	B-1300SS	Stainless Steel	1304 Lbs.	48" x 41" x 66"	330 Lbs.	\$6,790
Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail						

B-1500SS / B-1650SS	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-1500SS	Stainless Steel	1500 Lbs.	60" x 41" x 62"	360 Lbs.	\$7,550
	B-1650SS	Stainless Steel	1605 Lbs.	60" x 41" x 66"	375 Lbs.	\$7,810
Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail						



DISPENSER STANDS

SD STANDS DM and DCM Series Dispensers	Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	SD-200	DM-200B	30" x 28" x 32 ^{13/16"}	105 lbs.	\$1,880
	SD-271	DCM-271 (-OS)	16 ^{1/2"} x 24" x 35 ^{3/16"}	85 lbs.	\$1,390
	SD-500	DCM-300 (-OS) / DCM-500 (-OS)	25 ^{7/8"} x 22" x 32 ^{3/4"}	90 lbs.	\$1,510
	SD-750	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 ^{3/4"}	110 lbs.	\$1,900
Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available (optional) \$290 Leg Kits: HS-2066 Seismic Kit for SD 500 Stands \$210 HS-2071 Leg Seismic Kit SD 500 Stands \$530 Four 6" Painted Legs included NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.					

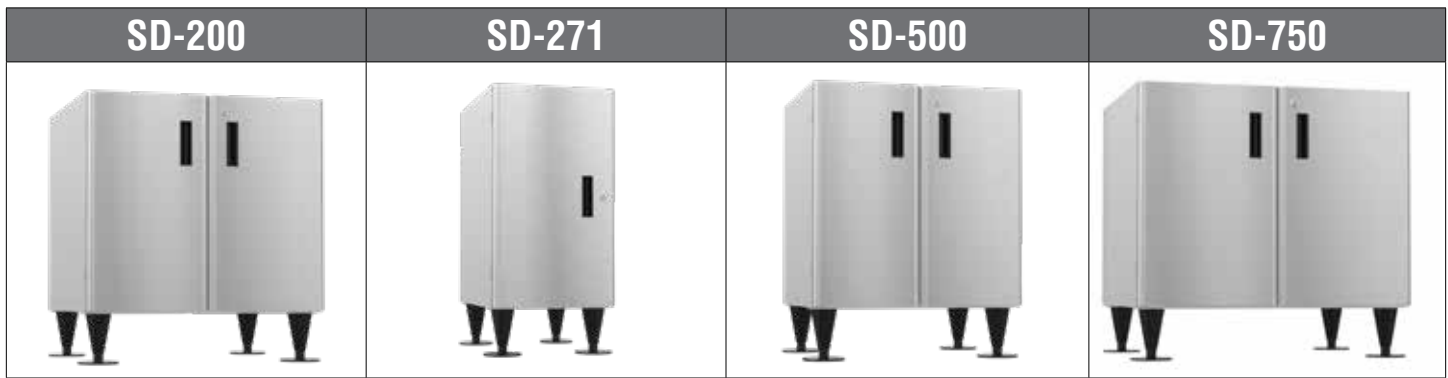

- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance

- Attractive stainless steel exterior
- Locking doors standard



Intertek

HCD ICE BAGGING SYSTEM SERIES	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H	Shipping Weight	List F.O.B. Kloppenberg
	HCD-500B	Stainless Steel	647 Lbs.	30" x 36" x 71"	510 Lbs.	\$23,970
	HCD-1000B	Stainless Steel	1078 Lbs.	48" x 36" x 71"	590 Lbs.	\$27,210
48" heavy duty ice paddle included						





TOP KIT MATRIX

	22" Width	22" Width	30" Width	30" Width	44" Width	44" Width	48" Width	60" Width
	KM-350M KM-520M KM-660M F-450M F-801M F-1002M	KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	KM-901M KM-1340M KM-1601M KML Series F-1501M F-2001	KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**
22" Width B-300SF DB-130H	— (DB-130H - KMD only)	HS-5424 HS-2153 <i>(KMD-410 on B-300 only)</i>	N/A	N/A	N/A	N/A	N/A	N/A
BD-300SF†	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
BD-500SF†	N/A	N/A	N/A	— <i>(Only fits KMD Units)</i>	N/A	N/A	N/A	N/A
44" Width B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 <i>(KMD-410M does not apply.)</i>	N/A	N/A
48" Width B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900SF	HS-2035 & HS-2033	HS-2035 & HS-2033/2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED <i>(HS-5397 for IM-500)</i>	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H DM-200B	HS-2036 <i>(Only fits KM Units)</i>	N/A	— <i>(Only fits KML Units)</i>	N/A	N/A	N/A	N/A	N/A

*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Icemakers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

§KMS, KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With	List F.O.B. Griffin
HS-2129	B-500 Bins	\$290
HS-2130	B-700 Bins	\$340
HS-2131	B-800 Bins	\$400
HS-2132	B-800 & B-900 Bins	\$490
HS-2147	B-1150 & 1300 Bins	\$260
HS-2153	B-300 Bins	\$190
HS-5424	KMD on DB-130	\$90

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)


Model Number	Description	List F.O.B. Griffin
HS-2032	4" ABS Top Kit	\$220
HS-2033	8" ABS Top Kit	\$240
HS-2034	14" ABS Top Kit	\$240
HS-2035	22" ABS Top Kit	\$260
HS-2036	(2) 4" ABS Top Kits for KM on DB-200H	\$220
HS-2111	11.3" x 26.2" Stainless Cover/Separator	FREE
HS-2148	30" x 3.1" Stainless Cover	\$210
HS-5065	Front Panel Filter Kit for KMD-460/530M	\$620
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650	\$220



REMOTE CONDENSER

AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

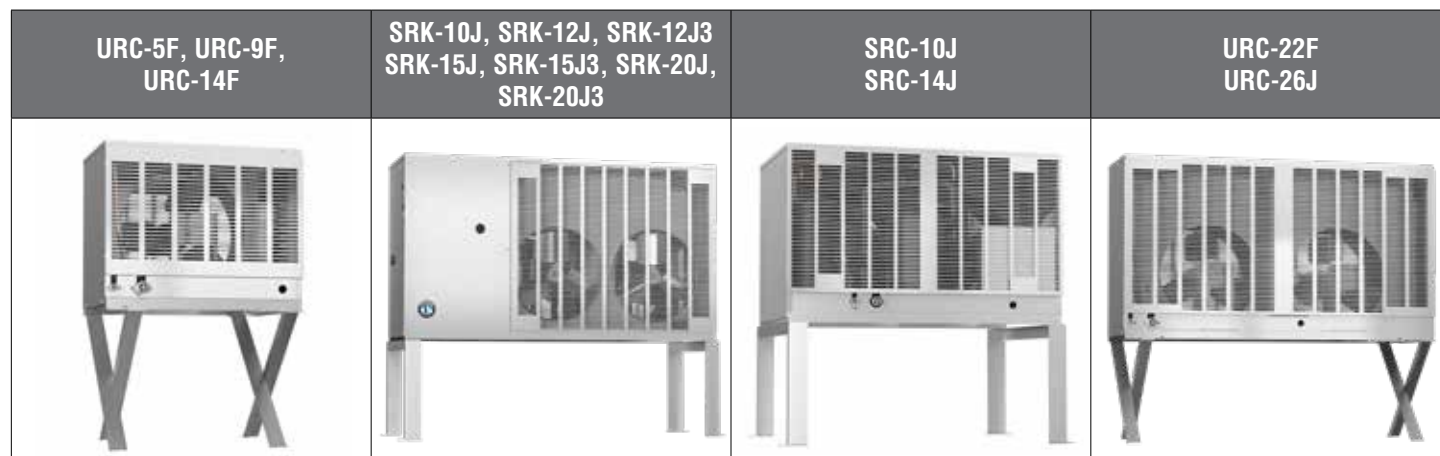

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-5F	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	115/60/1	21 ^{15/16} " x 14 ^{1/8} " x 32 ^{13/16} "	60 Lbs.	\$1,680
Accessories					
Tubing Kit: R404-2046-2 - 20' Pre-charged R-404A					\$440
R404-3546-2 - 35' Pre-charged R-404A					\$580
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$230

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-9F	KML-700MRJ, KMD-860MRJ	115/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	95 Lbs.	\$1,920
Accessories					
Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A					\$440
R404-3568-2 - 35' Pre-charged R-404A					\$580
R404-5568-2 - 55' Pre-charged R-404A					\$730
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$230

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	230/60/1	38" x 29" x 37"	270 Lbs.	\$4,190
Accessories					
Tubing Kit: HS-5299 - 25' Brazing Required R-404A					\$440
HS-5300 - 35' Brazing Required R-404A					\$570
HS-5301 - 55' Brazing Required R-404A					\$710

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-10J	KMS-822MLJ	230/60/1**	38" x 29" x 37"	226 Lbs.	\$4,860
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$440
HS-0251 - 35' Brazing Required R-404A					\$570
HS-0252 - 55' Brazing Required R-404A					\$710

**3 wire with neutral for 115V



REMOTE CONDENSER

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-12J	KMS-1122MLJ	230/60/1**	50" x 19 ^{1/2} " x 43"	273 Lbs.	\$5,390
SRK-12J3	KMS-1122MLJ	230/60/3	50" x 19 ^{1/2} " x 43"	273 Lbs.	\$5,610
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$440
HS-0251 - 35' Brazing Required R-404A					\$570
HS-0252 - 55' Brazing Required R-404A					\$710
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRC-14J	FS-1501MLJ-C	230/60/1	37 ^{3/4} " x 26 ^{5/8} " x 37"	235 Lbs.	\$5,190

Accessories					
Tubing Kit: HS-5323 - 25' Brazing Required R-404A					\$440
HS-5324 - 35' Brazing Required R-404A					\$570
HS-5325 - 55' Brazing Required R-404A					\$710
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-15J	KMS-1402MLJ	230/60/1**	50" x 19 ^{1/2} " x 43"	275 Lbs.	\$5,990
SRK-15J3	KMS-1402MLJ	230/60/3	50" x 19 ^{1/2} " x 43"	275 Lbs.	\$6,100
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$440
HS-0251 - 35' Brazing Required R-404A					\$570
HS-0252 - 55' Brazing Required R-404A					\$710
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-14F	KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C)	115/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	110 Lbs.	\$2,000
Accessories					
Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A					\$440
R404-3568-2 - 35' Pre-charged R-404A					\$580
R404-5568-2 - 55' Pre-charged R-404A					\$730
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$230
HS-5102 - Hail Guard Kit					\$280



REMOTE CONDENSER

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-20J	KMS-2000MLJ	230/60/1**	59 ^{9/16} " x 19 ^{1/2} " x 45"	325 Lbs.	\$10,790
SRK-20J3	KMS-2000MLJ	230/60/3	59 ^{9/16} " x 19 ^{1/2} " x 45"	325 Lbs.	\$10,900
Accessories					
Tubing Kit: HS-0243 - 25' Brazing Required R-404A					\$440
HS-0244 - 35' Brazing Required R-404A					\$570
HS-0245 - 55' Brazing Required R-404A					\$750
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-22F	KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ3(-C)	115/60/1	46 ^{3/8} " x 14 ^{1/16} " x 40 ^{1/2} "	165 Lbs.	\$2,900
URC-26J	KM-2600SRJ3	115/60/1	46 ^{3/8} " x 14 ^{1/16} " x 40 ^{1/2} "	273 Lbs.	\$3,770
Accessories					
Tubing Kit: R404-20610 - 20' Pre-charged R-404A					\$440
R404-35610 - 35' Pre-charged R-404A					\$580
R404-55610 - 55' Pre-charged R-404A					\$780
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$230
HS-5095 - Hail Guard Kit					\$200

REMOTE CONDENSER MATRIX

Line Sets - PRE-CHARGED

Remote Condenser	Ice Machines	Shipping Weight	20' Length	35' Length	55' Length
URC-5F	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	60 Lbs.	R404-2046-2	R404-3546-2	N/A
URC-9F	KML-700MRJ, KMD-860MRJ	95 Lbs.	R404-2068-2	R404-3568-2	R404-5568-2
URC-14F	KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C)	110 Lbs.	R404-2068-2	R404-3568-2	R404-5568-2
URC-22F	KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ(3)(-C)	165 Lbs.	R404-20610	R404-35610	R404-55610
URC-26J	KM-2600SRJ3	273 Lbs.	R404-20610	R404-35610	R404-55610

Line Sets - BRAZING REQUIRED

Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	200 Lbs.	HS-5299*	HS-5300*	HS-5301*
SRK-10J	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-12J SRK-12J3	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRC-14J	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
SRK-15J SRK-15J3	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-20J SRK-20J3	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

*Line sets require refrigerant



WATER FILTRATION

Model Number	Description	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
H9320-51 Use E-10 10" Prefilter	Single	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 DKM-500	IM-200,500	All Models	All Models
H9320-52 Use E-20 20" Prefilter	Twin	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
H9320-53 Use E-20 20" Prefilter	Triple	N/A	KM-1301, 1340, 1601, 1900, KM-2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
H9655-11	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
H9320-51	Single	18.4" H	\$420
H9320-52	Twin	19.11" H	\$710
H9320-53	Triple	19.15" H	\$990
H9655-11	Replacement Cartridge each		\$170
H9655-06	Replacement Cartridge (6 pk)		\$800

Prefilters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
9534-26	E-20 Replacement Cartridges (6 pk)		\$190
9534-12	E-10 Replacement Cartridges (12 pk)		\$200
9534-20	E-20 Replacement Cartridges (20 pk)		\$410
9534-40	E-10 Replacement Cartridges (40 pk)		\$390
9795-80	E-10 Prefilter (10")		\$240
9795-90	E-20 Prefilter (20")		\$320



Triple Configuration Shown
(Single and Twin Configurations Available)



ICE MACHINE ACCESSORIES

Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
HS-5282	Low Flow (.34 GPM)	AM-51B, KM-81B, KM-161B	N/A	N/A	All Models	N/A
HS-5283	Standard Flow (1.3 GPM)	KM-231B, KM-301B	KM-350M, KML-325M, 500M, KMD-410M, DKM-500B	IM-200BAB IM-500SAA	N/A	N/A
HS-5284	Fast Flow (4.2 GPM)	N/A	KM - 520M, 660M, 901M, 1100M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD - 460M, 530M, 860M, 901M, KML-700M KMS - 822M, 830M, 1122M, 1402M, 2000M KMH-2100S	N/A	N/A	N/A
HS-5285	Replacement Cartridge (1) One each					

Model Number	Description	Overall Dimensions Model W x D x H	List F.O.B. Griffin
HS-5282	Low Flow (.34 GPM)	3.8" x 3.6" x 8.0"	\$950
HS-5283	Standard Flow (1.3 GPM)	3.8" x 3.6" x 8.0"	\$950
HS-5284	Fast Flow (4.2 GPM)	5.98" x 3.6" x 9.28"	\$950
HS-5285	Replacement Cartridge each		\$560



HS-5282
EcO₃Ice Low Flow
Ozone System

HS-5284
EcO₃Ice Fast Flow
Ozone System

HS-5285
EcO₃Ice Ozone
System
Replacement
Cartridge

HS-5283
EcO₃Ice Standard
Flow Ozone System

EcO₃Ice™




Remote Monitoring System For use on Hoshizaki cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight	List F.O.B. Griffin
HS-5562	KM cuber ice machines	8"	8"	3"	1 lb.	\$700



- Performance dashboard for status, historical data
- Alert notification by email or text
- Remotely diagnose machines
- Control functions: ON/OFF, Reset, Lock-down

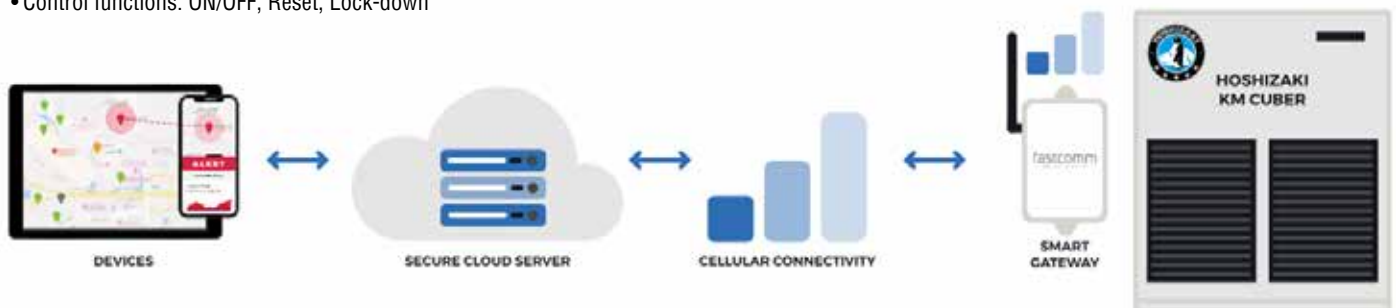



STEELHEART



HOSHIZAKI'S Steelheart Series is a commercial line engineered for durability, performance and efficiency. As anyone that runs a commercial kitchen knows, only the strong survive. Just like our legendary ice makers, we've designed our new refrigeration series to survive conditions that would send lesser equipment to the scrap yard. Without compromising performance, Hoshizaki seeks natural solutions such as sustainable materials and hydrocarbon refrigerants for a clean and healthy environment. Combined with Hoshizaki's unique ducted airflow technology, food products remain fresh, nutritious, and safe as a result of uniform temperatures and quick recovery.

- Hoshizaki Steelheart products comply with the Buy American Act.
- All Stainless construction - inside and out.
- Durable and easy to clean.
- Designed to be reliable.
- Fewer parts and non-critical features means less service calls.
- Top mount refrigeration is easier to clean and creates more interior and exterior storage space.
- Uprights accommodate full-size tray pans and roll through standard entryways with casters.
- Uses environmentally friendly R290 hydrocarbon refrigerant
- Endlessly configurable to meet workflow needs
- Maintains NSF safe temperatures in 100° environments.
- Air circulates evenly, even when over-stuffed.



REFRIGERATION MODEL NUMBER IDENTIFICATION CODE



HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 A - 18MD2

- Series Identification
 - U Undercounter
 - W Worktop
 - S Sandwich Prep/Mega Top
 - P Pizza Prep
 - C Chef Base
- Model Identification
 - R Refrigerator
 - F Freezer
- Unit Width
 - ## In Inches
- Series Modification
 - A Alphabetically increases per model revisions
- Options Configuration
 - LP / -D Low Profile / Drawers
 - # / -#D# Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
 - #M/ -#MD# Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
 - 01 Unit with Cylinder Lock

SR48A-18MD2

Mega Top Prep Table,
Refrigerator,
48" Wide,
Revision A*,

(18) 1/6 Sized Pan Capacity in Rail,
Door and 2 Drawers*

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS
PT & RT ONLY

- Model Identification
 - R Refrigerator
 - F Freezer
 - DT Dual Temp
 - PT Pass Thru
 - RN Roll In
 - RT Roll Thru
- Number of Sections
 - 1/2/3 One, Two, or Three Sections
- Series Modification
 - A Alphabetically increases per model revisions
- Door Configuration
 - FS / -HS Full Height or Half Height Stainless Door
 - FG / -HG Full Height or Half Height Glass Door
 - FSL / -HSL Full Height or Half Height Stainless Door, Left-Hand Hinge

RIA-FS

Upright Refrigerator,
One Section
Revision A*,

Full Stainless Door

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





WARRANTY

EFFECTIVE: April 1, 2021

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS:

Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

Steelheart Series Refrigerators & Freezers

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor.

Compact Undercounter Refrigerators - HR24 & HR15

3-Year - Parts & Labor on entire machine.

Back Bar Refrigerators & Glass Door Merchandisers

3-Year - Parts & Labor on entire machine.

5-Year - Parts on Compressor.

Economy Refrigeration Series

2 Year - parts and Labor on entire machine.

5 Year - Parts on Compressor

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS



UPRIGHT REFRIGERATORS



R1A-FS(L)
ENERGY STAR
Qualified

R1A-HS(L)
ENERGY STAR
Qualified

R2A-FS

R2A-HS

R3A-FS

R3A-HS

- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, maintains uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	R1A-FS (L) - Left-Hand hinge	R1A-HS (L) - Left-Hand hinge	R2A-FS	R2A-HS	R3A-FS	R3A-HS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	80.71 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.10 ft ³	23.10 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75"
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 22.9" x 6"	21.25" x 26" (C) 22.9" x 6"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4.3	4.3	7.1	7.1	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	2.48	4.39	4.39
*Heat Rejection (BTU / hr)	317	317	513	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	33° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$6,920	\$8,250	\$9,210	\$11,180	\$16,050	\$18,340


*Based on 100°F ambient cycling at set point

See Refrigeration Accessories on pages 84-89 for options and prices





UPRIGHT REFRIGERATORS

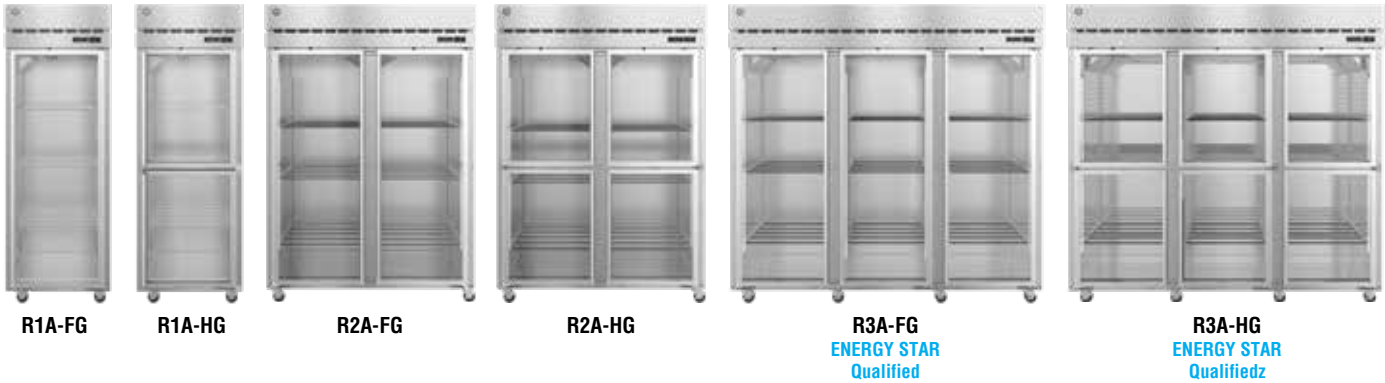


- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG	R3A-HG
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	74.3 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75"
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	840 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
*Heat Rejection (BTU / hr)	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,590	\$10,130	\$11,780	\$13,210	\$22,760	\$24,240

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



UPRIGHT FREEZERS

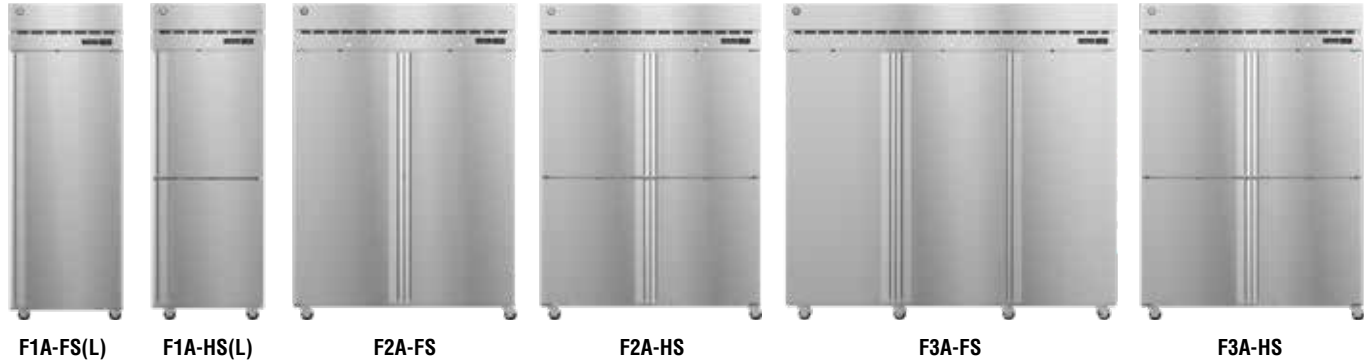

- Stainless steel interior and exterior front, sides and top
- 4" Heavy duty stem casters standard
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	F1A-FS (L) - Left-Hand hinge	F1A-HS (L) - Left-Hand hinge	F2A-FS	F2A-HS	F3A-FS	F3A-HS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	80.71 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75"	59.25"	27.75"	59.25"	27.75"
Adjustable Shelves	3	3	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 6" x 18"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.5	8.5	8.7	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	12.16	17.02	17.02
*Heat Rejection (BTU / hr)	1178	1178	1820	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,640	\$9,830	\$12,120	\$13,830	\$17,980	\$19,950

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices





UPRIGHT FREEZERS /DUAL TEMP



F1A-FG



F1A-HG



F2A-FG



F2A-HG



DT1A-HS



DT2A-FS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard even when full

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	10.05 ft ³	47.22 ft ³
Interior Storage Capacity (AHAM) - Refrigerator Freezer	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	10.19 ft ³ 10.19 ft ³	23.10 ft ³ 23.10 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	61.75"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75"	59.25"	27.75"	27.75"	59.25"
Adjustable Shelves	3	3	6	6	3	3
Center Shelves (C)	N/A	N/A	3	3	N/A	N/A
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 18"	(L/R) 21.25" x 26" (C) 6" x 18"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	8.5	8.5	9.1	9.1	5.5	14
HACR Breaker (AMP)	15	15	15	15	15	20
Energy Consumption (kWh / day) ASHRAE	7.73	7.73	16.3	16.3	4.49	8.59
*Heat Rejection (BTU / hr)	806	806	1694	1694	168 439	376 1401
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
Ambient Temp. Range	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
Control Set Point Range - Refrigerator Freezer	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$12,720	\$13,050	\$17,980	\$18,790	\$15,600	\$20,500

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



PASS THRU REFRIGERATORS

STEELHEART



PT1A-FS-FS
(Shown with door open)
ENERGY STAR
Qualified



PT1A-HS-HS
ENERGY STAR
Qualified



PT2A-FS-FS



PT2A-HS-HS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FS-FS	PT1A-HS-HS	PT2A-FS-FS	PT2A-HS-HS
Interior Storage Capacity (AHAM)	24.2 ft ³	24.2 ft ³	52.50 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75"	59.25"	27.75"
Adjustable Shelves	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	357 lbs	357 lbs	592 lbs	592 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	5	5	8	8
HACR Breaker (AMP)	15.0 Amps	15.0 Amps	15.0 Amps	15.0 Amps
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	3.24	3.24
*Heat Rejection (BTU / hr)	348	348	1429	1429
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$14,560	\$16,820	\$19,620	\$23,140

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

PASS THRU REFRIGERATORS



PT1A-FG-FG



PT2A-FG-FG

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights

- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FG-FG	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.2 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 37.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	82.5"	82.5"
Interior Door Opening Width	21.75"	21.75"
Interior Door Opening Height	59.25"	59.25"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.75" x 30.75"	21.25" x 26"
Crated Shipping Weight	367 lbs.	681 lbs.
Crated Shipping Dimensions (L x W x H)	41.25" x 31.5" x 81"	58" x 41.25" x 81"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	5	8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.68	6
*Heat Rejection (BTU / hr)	653	1429
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$17,470	\$24,580

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



ROLL IN REFRIGERATORS

STEELHEART



RN1A-FS



RN2A-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Roll in racks up to 72" tall (supplied by others) roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RN2A-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 34.5" x 87.5"	68" x 34.5" x 87.5"
Depth with Doors Open at 90°	65.25"	65.25"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	429 lbs	676 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39: x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
*Heat Rejection (BTU / hr)	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$12,850	\$18,590

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



STEELHEART

ROLL THRU REFRIGERATORS



RT1A-FS-FS



RT2A-FS-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures

- Reinforced stainless steel ramp and floor accommodate roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RT1A-FS-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 36.75" x 87.5"	68" x 36.75" x 87.5"
Depth with Doors Open at 90°	98.5"	98.5"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	459 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
*Heat Rejection (BTU / hr)	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$16,580	\$23,990

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices

COMPACT UNDERCOUNTER REFRIGERATORS

STEELHEART



HR15A
ENERGY STAR
Qualified



HR24C
ENERGY STAR
Qualified



- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 

- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting

Model Number	HR15A	HR24C
Interior Storage Capacity (AHAM)	2.54 ft ³	4.0 ft ³
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	23.4" x 24.7" x 31.5"
Depth with Doors Open at 90°	37.25"	46.7"
Interior Door Opening Width	25.75"	24.7"
Adjustable Shelves	2	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	26.8" x 24" x 36.6"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	.9	1.1
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	0.34	0.64
Heat Rejection (BTU/hr)	145	648
Voltage Range	104 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 100°F
Control Set Point Range	33° - 41°F	34° - 52°F
Refrigerant	R600a	R600a
List F.O.B. Griffin	\$2,350	\$3,010



UNDERCOUNTER REFRIGERATORS



UR27A(-01)
ENERGY STAR
Qualified



UR27A-LP
ENERGY STAR
Qualified



UR36A(-01)
ENERGY STAR
Qualified



UR48A(-01)
ENERGY STAR
Qualified



UR60A(-01)
ENERGY STAR
Qualified



UR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Electronic controls

Model Number	UR27A UR27A-01** (01 Cylinder Door Lock)	UR27A-LP Low Profile unit meets ADA requirements	UR36A UR36A-01** (01 Cylinder Door Lock)	UR48A UR48A-01** (01 Cylinder Door Lock)	UR60A UR60A-01** (01 Cylinder Door Lock)	UR72A UR72A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	7.2 ft ³	9.9 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	6.22 ft ³	8.7 ft ³	11.95 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.63"	27" x 30" x 31.9"	36" x 30" x 33.63"	48" x 30" x 33.63"	60" x 30" x 33.63"	72" x 30" x 33.63"
Depth with Doors Open at 90°	55.5"	55.5"	58.5"	52.5"	58.5"	51.5"
Interior Door Opening Width	22.6"	22.6"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	1	2	2	3
Shelf Dimensions (W x D)	27" x 16"	22" x 16"	31" x 16"	21.38" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	175 lbs.	170 lbs.	205 lbs.	250 lbs.	295 lbs.	340 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 36"	32" x 32" x 36"	38" x 32" x 36"	51" x 32" x 36"	62" x 32" x 36"	74" x 32" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.4	2.6	3.1	3.0
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.63	0.63	0.54	0.8	0.89	1.3
Heat Rejection (BTU / hr)	190	190	222	215	291	263.5
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,140 **\$4,410	\$4,140	\$5,610 **\$5,880	\$6,160 **\$6,690	\$6,840 **\$7,370	\$7,840 **\$8,640

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices



UNDERCOUNTER GLASS DOOR REFRIGERATORS & FREEZER

STEELHEART



UR27A-GLP01
ENERGY STAR
Qualified



UR48A-GLP01
ENERGY STAR
Qualified



UF27A-GLP01
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Standard 2.25" casters (2 with brakes)
- Glass doors with locks are energy efficient multi pane, argon filled
- Energy efficient LED interior lights with on/off switch
- Meets ADA requirements 
- Field reversible glass doors

Model Number	UR27A-GLP01	UR48A-GLP01	UF27A-GLP01
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	7.21 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	6.22 ft ³
Overall Dimensions W x D x H including 2.25" casters)	27" x 31.5" x 31.9"	48" x 31.5" x 31.9"	27" x 31.5" x 31.9"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.6"	19.5"	22.6"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	1	1
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	22" x 16"
Crated Shipping Weight	185 lbs.	265 lbs.	185 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 32" x 36"	52.5" x 36" x 35.5"	36" x 32" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.9	2.6	2.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.86	1.15	3.13
Heat Rejection (BTU / hr)	463	465	463
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$5,990	\$8,750	\$6,530

Made to order: Please contact your local Hoshizaki Sales Representative for availability. See Refrigeration Accessories on pages 84-89 for options and prices



UNDERCOUNTER FREEZERS



UF27A(-01)
ENERGY STAR
Qualified



UF27A-LP



UF48A(-01)



UF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Enamel coated evaporator coil

Model Number	UF27A UF27A-01** (01 Cylinder Door Lock)	UF27A-LP Low Profile unit meets ADA requirements	UF48A UF48A-01** (01 Cylinder Door Lock)	UF60A UF60A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.2 ft ³	7.2 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	6.22 ft ³	11.95 ft ³	15.38 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.63"	27" x 30" x 31.9"	48" x 30" x 33.63"	60" x 30" x 33.63"
Depth with Doors Open at 90°	54.5"	55.5"	52.5"	58.5"
Interior Door Opening Width	22.6"	22.6"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	180 lbs.	175 lbs.	270 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 36"	32" x 32" x 36"	51" x 32" x 36"	62" x 32" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.3	5.9	5.6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.08	2.49	3.64	4.22
Heat Rejection (BTU / hr)	463	492	656	804.2
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$4,850 **\$5,110	\$5,030	\$7,140 **\$7,670	\$8,890 **\$9,420

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices



UNDERCOUNTER REFRIGERATORS with DRAWERS



UR27A-D2



UR48A-D4



UR60A-D4



UR72A-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Enamel coated evaporator coil

Model Number	UR27A-D2	UR48A-D4	UR60A-D4	UR72A-D6
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.63"	48" x 30" x 33.63"	60" x 30" x 33.63"	72" x 30" x 33.63"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	205 lbs.	315 lbs.	365 lbs.	445 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 36"	51" x 32" x 36"	62" x 32" x 36"	74" x 32" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.6	3.3	3.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.34	1.4	2.6	2.8
Heat Rejection (BTU / hr)	190	203	370	398
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$6,420	\$10,680	\$11,960	\$15,560

See Refrigeration Accessories on pages 84-89 for options and prices



UNDERCOUNTER FREEZERS with DRAWERS



UF27A-D2



UF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Electronic controls

Model Number	UF27A-D2	UF48A-D4
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.63"	48" x 30" x 33.63"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	175 lbs.	330 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 36"	51" x 32" x 36"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2.5	5.9
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.41	6.08
Heat Rejection (BTU / hr)	627	864
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$7,630	\$11,630

See Refrigeration Accessories on pages 84-89 for options and prices

WORKTOP REFRIGERATORS

STEELHEART



WR27A(-01)
ENERGY STAR
Qualified



WR36A(-01)
ENERGY STAR
Qualified



WR48A(-01)
ENERGY STAR
Qualified



WR60A(-01)
ENERGY STAR
Qualified



WR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Enamel coated evaporator coil
- 6" Stem casters standard

Model Number	WR27A WR27A-01** (01 Cylinder Door Lock)	WR36A WR36A-01** (01 Cylinder Door Lock)	WR48A WR48A-01** (01 Cylinder Door Lock)	WR60A WR60A-01** (01 Cylinder Door Lock)	WR72A WR72A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	9.9 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	8.7 ft ³	11.95 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width	22.6"	25.5"	19.5"	25.5"	19.5"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.38" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	185 lbs.	215 lbs.	260 lbs.	305 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 40.25"	38" x 32" x 40.25"	51" x 32" x 40.25"	62" x 32" x 40.25"	74" x 32" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.4	2.6	3.1	4.2
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.63	0.54	0.80	0.89	1.3
Heat Rejection (BTU / hr)	190	222	215	291	263.5
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,340 **\$4,600	\$5,920 **\$6,180	\$6,450 **\$6,980	\$7,170 **\$7,700	\$8,210 **\$9,010

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices



WORKTOP FREEZERS



WF27A(-01)
ENERGY STAR
Qualified



WF48A(-01)



WF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Electronic controls
- 6" Stem casters standard

Model Number	WF27A WF27A-01** (01 Cylinder Door Lock)	WF48A WF48A-01** (01 Cylinder Door Lock)	WF60A WF60A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.2 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	15.38 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.6"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	285 lbs.	320 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 40.25"	51" x 32" x 40.25"	62" x 32" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	5.9	5.6
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.08	3.64	4.22
Heat Rejection (BTU / hr)	463	656	804.2
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$5,090 **\$5,360	\$7,470 **\$8,000	\$9,240 **\$9,770

**SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.
See Refrigeration Accessories on pages 84-89 for options and prices



WORKTOP REFRIGERATORS with DRAWERS

STEELHEART



WR27A-D2



WR48A-D4



WR60A-D4



WR72A-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27A-D2	WR48A-D4	WR60A-D4	WR72A-D6
Nominal Storage Capacity	7.21ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Opening Width	22"	19.5"	25.5"	19.5"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	220 lbs.	325 lbs.	380 lbs.	450 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 40.25"	51" x 32" x 40.25"	62" x 32" x 40.25"	74" x 32" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.6	2.6	3.3	3.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.34	1.4	2.6	2.8
Heat Rejection (BTU / hr)	190	203	370	398
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$6,560	\$10,860	\$12,210	\$16,100

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices



WORKTOP FREEZERS with DRAWERS



WF27A-D2



WF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 6" Stem casters standard
- Heavy duty drawers with removeable gaskets
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

Model Number	WF27A-D2	WF48A-D4
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	220 lbs.	285 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 32" x 40.25"	51" x 32" x 40.25"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2.5	5.9
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.41	6.08
Heat Rejection (BTU / hr)	627	864
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$7,960	\$11,990

See Refrigeration Accessories on pages 84-89 for options and prices

DRAWER / DOOR COMBINATION REFRIGERATORS



UR48A-D2



UR60A-D2



WR48A-D2



WR60A-D2

- Stainless steel interior and exterior front sides and top
- Door/Drawer configuration can be located in any cabinet section
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Enamel coated evaporator coil
- Field reversible doors

Model Number	UR48A-D2	UR60A-D2	WR48A-D2	WR60A-D2
Nominal Storage Capacity	13.66 ft ³	17.55 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (AHAM)	12 ft ³	15.38 ft ³	11.95 ft ³	15.38 ft ³
Overall Dimensions (L x W x H)	48" x 30" x 33.63" (including 4" casters)	60" x 30" x 33.63" (including 4" casters)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	51.5"	58.5"	52.5"	58.5"
Depth With Drawer Fully Open	52"	52"	52"	52"
Door Opening Width	19.5"	25.5"	19.5"	25.5"
Shelves (#) / Dimensions(W x D)	(1) / 21.38" x 16"	(1) / 27.25" x 16"	(1) / 21.38" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep
Crated Shipping Weight	285 lbs.	288 lbs.	295 lbs.	340 lbs.
Crated Shipping Dimensions (L x W x H)	51" x 32" x 36"	62.5" x 34" x 36.5"	51" x 32" x 40.25"	62" x 32" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.6	3.3	2.6	3.3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.4	2.6	1.4	2.6
Heat Rejection (BTU / hr)	203	370	203	370
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,470	\$9,170	\$8,690	\$9,410

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.



STEELHEART

PREP TABLES SANDWICH TOP REFRIGERATORS



SR27A-8



SR36A-10



SR48A-8



SR48A-12

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR27A-8	SR36A-10	SR48A-8	SR48A-12
Nominal Storage Capacity	7.21 ft ³	9.9 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	8.7 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 30" x 44.25"	48" x 30" x 44.25"
Depth with Cutting Board installed	30.7"	30.7"	30.7"	30.7"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.6"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	22.9"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.3" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	210 lbs.	245 lbs.	295 lbs.	300 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 29" x 46"	39" x 32" x 46"	51" x 32" x 46"	51" x 32" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.7	2.5	2.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.9	2.6	4	4
Heat Rejection (BTU / hr)	270	364.1	567	567
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$4,710	\$6,680	\$6,600	\$7,420

See Refrigeration Accessories on pages 84-89 for options and prices

PREP TABLES SANDWICH TOP REFRIGERATORS

STEELHEART



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR60A-8	SR60A-12	SR60A-16	SR72A-12	SR72A-16	SR72A-18
Nominal Storage Capacity	17.55 ft ³	17.55 ft ³	17.55 ft ³	21.25 ft ³	21.25 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	15.38 ft ³	15.38 ft ³	15.38 ft ³	18.63 ft ³	18.63 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.7"	30.7"	30.7"	30.7"	30.7"	30.7"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	3	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	350 lbs.	350 lbs.	365 lbs.	405 lbs.	410 lbs.	420 lbs.
Crated Shipping Dimensions (L x W x H)	62" x 36" x 46"	62" x 32" x 46"	62" x 33" x 46"	73.75" x 32" x 46"	73.75" x 32" x 46"	73.75" x 32" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6	6.3	6.3	6.3
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.3	4.3	4.3	6.2	6.2	6.2
Heat Rejection (BTU / hr)	613	613	613	876	876	876
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,040	\$8,170	\$7,740	\$9,470	\$9,550	\$9,100

See Refrigeration Accessories on pages 84-89 for options and prices



STEELHEART

PREP TABLES - SANDWICH TOP REFRIGERATORS with DRAWERS



SR27A-8D2



SR48A-12D4



SR48A-12D2**

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- 6" Stem casters standard

Model Number	SR27A-8D2	SR48A-12D4	SR48A-12D2
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 30" x 44.25"	48" x 30" x 44.25"
Depth With Cutting Board Installed	30.7"	30.7"	30.7"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(1) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) ¼ size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	245 lbs	365 lbs.	335 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 29" x 46"	51" x 32" x 46"	51" x 32" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.5	2.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	1.9	3.2	3.2
Heat Rejection (BTU / hr)	270	452.3	452.3
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$7,380	\$11,820	\$10,030

**Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

PREP TABLES MEGA TOP REFRIGERATORS

STEELHEART



SR27A-12M



SR36A-15M



SR48A-12M



SR48A-18M

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27A-12M	SR36A-15M	SR48A-12M	SR48A-18M
Nominal Storage Capacity	7.2 ft ³	9.9 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	8.7 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	37.3"	37.3"	37.3"	37.3"
Depth with Doors Open at 90°	52.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.6"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	220 lbs.	255 lbs.	305 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 29" x 46"	38" x 36" x 46"	51" x 36" x 47"	51" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.7	2.5	2.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.9	2.6	3.2	3.2
Heat Rejection (BTU / hr)	270	364.1	452.3	452.3
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$5,650	\$7,270	\$8,590	\$8,220

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES MEGA TOP REFRIGERATORS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR60A-12M	SR60A-18M	SR60A-24M	SR72A-18M	SR72A-24M	SR72A-30M
Nominal Storage Capacity	17.55 ft ³	17.55 ft ³	17.55 ft ³	21.25 ft ³	21.25 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	15.38 ft ³	15.38 ft ³	15.38 ft ³	18.63 ft ³	18.63 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	37.3"	37.3"	37.3"	37.3"	37.3"
Depth With Doors Open At 90°	57.5"	57.5"	57.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	3	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	365 lbs.	375 lbs.	383 lbs.	420 lbs.	435 lbs.	440 lbs.
Crated Shipping Dimensions (L x W x H)	62" x 36" x 46"	62" x 36" x 46"	62" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6.0	6.0	6.0	6.1	6.1	6.1
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.3	4.3	4.3	6.1	6.1	6.1
Heat Rejection (BTU / hr)	613	613	613	874	874	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$9,470	\$9,580	\$9,210	\$10,910	\$11,100	\$10,530

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES - MEGA TOP REFRIGERATORS with DRAWERS



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27A-12MD2	SR48A-18MD4	SR60A-24MD4	SR72A-30MD6
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	15.4 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	37.3"	37.3"	37.3"
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	250 lbs.	380 lbs.	460 lbs.	540 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 29" x 46"	51" x 36" x 46"	62" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.5	6	6.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.9	3.2	4.3	6.1
Heat Rejection (BTU / hr)	270	452.3	613	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,980	\$12,750	\$15,360	\$18,780

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES - MEGA TOP DRAWER / DOOR COMBINATIONS



SR48A-18MD2



SR60A-24MD2



SR72A-30MD2



SR72A-30MD4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48A-18MD2	SR60A-24MD2	SR72A-30MD2	SR72A-30MD4
Nominal Storage Capacity	13.66 ft ³	17.6 ft ³	21.25 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	11.95 ft ³	15.4 ft ³	19.7 ft ³	19.7 ft ³
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	37.3"	37.3"	37.3"	37.3"
Depth with Door Open at 90°	52.5"	52.5"	52.5"	52.5"
Depth With Drawer Fully Open	52"	52"	52"	52"
Shelves (#) / Dimensions (WxD)	(1) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	345 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	51" x 36" x 46"	62" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	6.0	6.1	6.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	3.2	4.3	6.1	6.1
Heat Rejection (BTU / hr)	452.3	613	874	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F. O. B. Griffin	\$11,130	\$13,790	\$15,080	\$16,850

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.

PREP TABLES - PIZZA REFRIGERATORS



PR46A



PR67A



PR93A

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Full complement of 1/3rd size pans are standard
- 1/2" x 19" Cutting board standard

Model Number	PR46A	PR67A	PR93A
Nominal Storage Capacity	11 ft ³	19.9 ft ³	30 ft ³
Overall Dimensions (W x D x H including 6" casters)	46" x 32.25" x 43.5"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36"	35"	35"
Depth with Doors Open at 90°	59.5"	56.75"	56.75"
Interior Door Opening Width	22.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	2	4	6
Shelf Dimensions (W X D)	22" x 16"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	312 lbs.	422 lbs.	577 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	4.8	5.4	6.2
Heat Rejection (BTU / hr)	688	767	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$9,240	\$12,800	\$17,120

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES - PIZZA REFRIGERATORS with DRAWERS



PR46A-D2



PR67A-D4



PR93A-D6

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 19" Cutting board standard

Model Number	PR46A-D2	PR67A-D4	PR93A-D6
Nominal Storage Capacity	11 ft ³	19.9 ft ³	30 ft ³
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.5"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36"	36"	36"
Depth with Drawer Fully Open	57.5"	57.5"	57.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	9	12
Crated Shipping Weight	365 lbs.	511 lbs.	693 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	4.8	5.4	6.2
Heat Rejection (BTU / hr)	688	767	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$11,720	\$18,210	\$25,160

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES - PIZZA DRAWER / DOOR COMBINATIONS

STEELHEART



PR67A-D2



PR93A-D2



PR93A-D4

- Stainless steel interior and exterior front sides and top
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Adjustable ducted air distribution for rail/cabinet

Model Number	PR67A-D2	PR93A-D2	PR93A-D4
Interior Storage Capacity (AHAM)	19.9 ft ³	30 ft ³	30 ft ³
Overall Dimensions (W x D x H including 6" casters)	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	35"	35"	35"
Depth with Door Open at 90°	56.75"	56.75"	56.75"
Depth with Drawer Fully Open	56.5"	56.5"	56.25"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(2) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	9	12	12
Crated Shipping Weight	465 lbs.	616 lbs.	654 lbs.
Crated Shipping Dimensions (L x W x H)	71" x 36" x 45"	95" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6.5	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	5.4	6.2	6.2
Heat Rejection (BTU / hr)	767	877	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Temperature Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$15,670	\$20,070	\$22,750

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.



REFRIGERATED EQUIPMENT STANDS



CR36A



CR49A



CR60A



CR72A



CR85A



CR98A



CR110A

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36A	CR49A	CR60A	CR72A	CR85A	CR98A	CR110A
Overall Dimensions (W x D x H including 4" casters)	36.5" x 32.25" x 26"	49" x 32.25" x 26"	60.5" x 32.25" x 26"	72.52" x 32.25" x 26"	85" x 32.25" x 26"	98" x 32.25" x 26"	110.5" x 32.25" x 26"
Depth with Drawer Fully Open	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
Maximum Pan Depth	6"	6"	6"	6"	6"	6"	6"
Worktop Maximum Load Capacity	700 lbs	700 lbs	700 lbs	1200 lbs	1200 lbs	1500 lbs	1500 lbs
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
Pan Capacity (12" x 20")	2	2.5	2.5	8	10	12	12
Crated Shipping Weight	295 lbs.	327 lbs.	370 lbs.	500 lbs.	567 lbs.	640 lbs.	595 lbs.
Crated Shipping Dimensions (L x W x H)	38" x 34.5" x 30.5"	51" x 35.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.2	2.7	2.7	3.0	3.0	3.0	3.0
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	1.6	2.1	2.1	2.78	2.9	3.69	3.69
Heat Rejection (BTU / hr) @ NSF	223	303	303	395	415	525	525
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$12,840	\$14,000	\$14,520	\$16,670	\$19,430	\$21,630	\$22,300

See Refrigeration Accessories on pages 84-89 for options and prices



SUSHI CASES

Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant



Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F. O. B. Griffin
HNC-120BA-R-SLH	Air-Cooled	Right Side	47.2" x 13.6" x 11"	50.5" x 16.5" x 20.5"	115V/60/1	92 Lbs.	\$5,080
HNC-120BA-L-SLH	Air-Cooled	Left Side	47.2" x 13.6" x 11"	50.5" x 16.5" x 20.5"	115V/60/1	94 Lbs.	\$5,080
HNC-150BA-R-SLH	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	\$5,490
HNC-150BA-L-SLH	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	\$5,490
HNC-180BA-R-SLH	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	\$6,140
HNC-180BA-L-SLH	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	\$6,140
HNC-210BA-R-SLH	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	\$6,790
HNC-210BA-L-SLH	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	\$6,790


"R" - Condensing Unit is on RIGHT from front view

"L" - Condensing Unit is on LEFT from front view


Not intended for overnight storage. NSF Standard 7




HNC-120BA-L-SLH

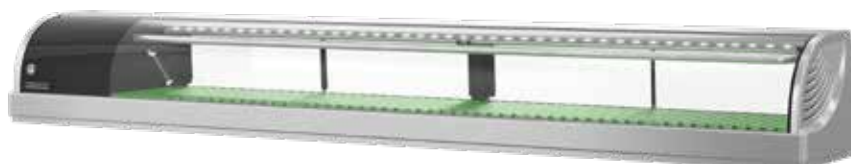

HNC-210BA-L-SLH

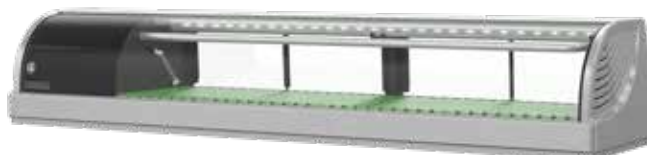

HNC-150BA-L-SLH



HNC-180BA-L-SLH



GLASS DOOR MERCHANDISERS



RM-7-HC

RM-10-HC
ENERGY STAR
Qualified

RM-26-HC
ENERGY STAR
Qualified

RM-45-SD-HC
(Sliding doors)

RM-49-HC

RM-65-HC

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass

- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
Nominal Storage Capacity	5.97 ft ³	8.74 ft ³	26 ft ³	38.26 ft ³	42.61 ft ³	56.04 ft ³
Capacity	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
Overall Dimensions (W x D x H Including Leveling Feet)	21.25" x 25" x 37.75"	25" x 23" x 54.5"	30" x 29.75" x 78"	51" x 30.25" x 78.25"	60" x 29.75" x 78"	78" x 29.75" x 78"
Adjustable Shelves	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
Shelf Dimensions (W x D)	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
Crated Shipping Weight	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
Crated Shipping Dimensions (L x W x H)	28" x 25" x 44"	28" x 30" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.5" x 86"	81" x 33" x 84"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3.2	1.8	3.2	6.5	7.6	8.2
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ENERGY STAR / DOE	1.38	1.1	1.81	4.55	4.37	5.67
Approx. Nominal Compress BTU/HR (HP)	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
Control Set Point Range	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$3,930	\$4,340	\$5,520	\$8,150	\$8,500	\$11,350

See Refrigeration Accessories on pages 84-89 for options and prices



BACK BAR REFRIGERATORS



BB59



BB69



BB80



BB95

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.56 ft ³	22.17 ft ³	28.74 ft ³	32.4 ft ³
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5.2	2.5	2.5	5.2
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	63.5" x 33" x 42"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	101" x 33" x 42"
Shipping Weight	307 lbs.	350 lbs.	430 lbs.	429 lbs.
Refrigerant	R-134a	R290	R290	R-134a
List F.O.B. Griffin	\$5,720 *\$6,810	\$6,260 *\$7,500	\$7,220 *\$9,330	\$7,350 *\$9,470

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 84-89 for options and prices



BACK BAR REFRIGERATORS with GLASS DOORS



BB59-G



BB69-G



BB80-G



BB95-G

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.45 ft ³	22.14 ft ³	26.74 ft ³	32.53 ft ³
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5.2	5.2	5.2	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	73.5" x 33" x 42"	84" x 33" x 42"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs.	357 lbs.	396 lbs.	490 lbs.
Refrigerant	R-134a	R-134a	R-134a	R290
List F.O.B. Griffin	\$5,990 *\$6,910	\$6,770 *\$7,870	\$7,990 *\$9,590	\$8,130 *\$10,040

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 84-89 for options and prices

SLIDE TOP BOTTLE COOLERS



CC50



CC65



CC80



CC95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Cabinet Dimensions† W x D x H	53.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Capacity (AHAM) cu ft	14.4 ft³	19.6 ft³	24.67 ft³	27.98 ft³
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
Lids	2	2	3	3
Bin Dividers	3	4	6	7
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5.9	6.2	6.2	6.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 29"	69.5" x 33" x 42"	84" x 33" x 42"	101" x 33" x 42"
Shipping Weight	236 lbs.	275 lbs.	315 lbs.	379 lbs.
Refrigerant	R-134a	R-134a	R-134a	R-134a
List F.O.B. Griffin	\$4,850 *\$5,800	\$5,390 *\$6,300	\$6,800 *\$7,780	\$7,180 *\$8,250

*(-S) Stainless Steel Exterior option available - Made to order.

† Does not include 1" rear cabinet bumper or bottle cap catcher depth
See Refrigeration Accessories on pages 84-89 for options and prices



DIRECT DRAW REFRIGERATORS



DD24



DD59



DD69



DD80



DD95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Polished stainless-steel insulated towers with plated brass faucet
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Stainless steel threshold protects door frame from damage when loading and unloading
- Keg cushions standard to protect floor and increase air flow around kegs

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	7.46 ft ³	18.45 ft ³	22.14 ft ³	26.79 ft ³	32.53 ft ³
Door(s)	1	2	2	3	3
Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity 1/2 Barrels	1	2	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	28" x 33" x 43"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	165 lbs.	345 lbs.	360 lbs.	385 lbs.	430 lbs.
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,170 *\$5,300	\$6,970 *\$8,240	\$7,670 *\$9,660	\$8,170 *\$9,920	\$8,300 *\$10,080

*(-S) Stainless Steel Exterior option available - Made to order.
See Refrigeration Accessories on pages 84-89 for options and prices

ECONOMY REFRIGERATORS



ER1A-FS
ENERGY STAR
Qualified



ER2A-FS
ENERGY STAR
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	ER1A-FS	ER2A-FS
Interior Storage Capacity (AHAM)	17.8 ft ³	38.61 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.37" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2	4.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.06	2.1
Heat Rejection (BTU / hr)	1960(1/5HP)	4291(1/3HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$3,710	\$5,770

See Refrigeration Accessories on page 89 for options and prices



EF1A-FS



EF2A-FS

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EF1A-FS	EF2A-FS
Interior Storage Capacity (AHAM)	17.74 ft ³	38.54 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.37" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3.2	4.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.62	8.8
Heat Rejection (BTU / hr)	1399(1/3HP)	2074(1/2HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$4,480	\$6,720

See Refrigeration Accessories on page 89 for options and prices

UNDERCOUNTER ECONOMY REFRIGERATORS & FREEZERS



EUR27A
ENERGY STAR
Qualified



EUR48A
ENERGY STAR
Qualified



EUF27A
ENERGY STAR
Qualified



EUF48A
ENERGY STAR
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light
- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity


Model Number	EUR27A	EUR48A	EUF27A	EUF48A
Interior Storage Capacity (AHAM)	6.33 ft ³	12.09 ft ³	6.33 ft ³	12.09 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.5"	51.5"	55.75"	52.75"
Interior Door Opening Width	22.6"	19.5"	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"	22.75"	22.75"
Adjustable Shelves	1	2	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.8	1.2	1.7
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.21	1.92	3.44
Heat Rejection (BTU / hr)	1289(1/6HP)	1709(1/6HP)	993(1/6HP)	1468(1/6HP)
Voltage Range	115-127	115-127	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F	33° to 39°F	33° to 39°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$3,040	\$4,120	\$3,400	\$4,580

See Refrigeration Accessories on page 89 for options and prices







REFRIGERATION ACCESSORIES



CASTERS



**FOOT PEDAL
DOOR OPENER**



SHELVES



TRAY / PAN SLIDES

CASTERS & LEGS

Model Number	Description	List F.O.B. Griffin
HS-3546	4" Casters - Set of four, two with brakes (1/2 Section Uprights)	\$420
HS-3547	4" Casters - Set of six, three with brakes (3 Section Uprights)	\$640
HS-5035	4" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$110
HS-5036	6" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$150
HS-5037	2 1/4" Casters - Set of four, two with brakes (1 & 2 Section Undercounters) for ADA Compliant dimensions	\$120
HS-5320	3 3/8" Casters - Set of four, two with brakes (for pizza prep tables) for ADA Compliant dimensions	\$110
HS-5321	3 3/8" Casters - Set of six, three with brakes (for pizza prep tables) for ADA Compliant dimensions	\$160
LP-6 LEG	6" Stainless Steel Legs, set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$240
LP-6P LEG	6" Painted Leg (grey), set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$230

FOOT PEDALS

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5378	One Door Foot Pedal	Left Hand Hinge upright, solid door Steelheart models	\$300
HS-5379	One Door Foot Pedal	Right Hand Hinge upright, solid door Steelheart models	\$300
HS-5380	Two Door Foot Pedal	n/a	\$510
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Commercial Series and Steelheart solid door undercounter, worktop and sandwich prep table models.	\$300
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Commercial Series and Steelheart solid door undercounter, worktop and sandwich prep table models.	\$300

DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)	\$200
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)	\$200

SHELVES

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$200
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights	\$300
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$310



SHELVES...CONTINUED

HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights	\$290
HS-3505	Industrial Strength Stainless Steel Center Shelf , 3 each	2 Section Uprights	\$450
HS-3509	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights	\$220
HS-3510	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights	\$350
HS-3550	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Models	\$290
HS-3551	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Models	\$240
HS-3552	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Models	\$860
HS-3553	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Models	\$410
HS-5388	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights	\$220
HS-5389	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights	\$520
HS-5057	Tempered Glass Shelves, 3 each	For use with HR24B	\$220
HS-5058	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	\$100
HS-5235	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Prep Tables	\$160
HS-5059	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	\$100
HS-5108	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	\$120
HS-5116	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	\$240
HS-5117	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	\$290
HS-5118	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	\$340
HS-5151	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93	\$200
HS-5152	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46A	\$200
HS-5153	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93	\$350
HS-5154	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46A	\$360

OVERSHELVES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5172[†]	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	\$660
HS-5237[†]	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	\$730
HS-5173[†]	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	\$760
HS-5174[†]	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	\$930
HS-5175[†]	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,110
HS-5163[†]	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	\$820
HS-5236[†]	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	\$990
HS-5164[†]	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,180
HS-5165[†]	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,680
HS-5166[†]	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	\$2,170
HS-5229**	Single Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5229 Single Overshelves	\$830
HS-5231[†]	Single Overshelf for 67" Cabinet	67" Pizza Prep Tables	\$990
HS-5228**	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5228 Double Overshelves	\$1,260
HS-5230[†]	Double Overshelf for 67" Cabinet	67" Pizza Prep Tables	\$1,640

[†]Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after)

[†]Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after)

* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.

TRAY / PAN SLIDES**(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.**

Model Number	Description	List F. O. B. Griffin
HS-3557	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	\$190
HS-3558	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	\$610
HS-5092	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	\$140
HS-5093	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	\$440

PIZZ PREP TABLES - PAN SLIDES

Model Number	Description	List F. O. B. Griffin
HS-5514	Removable Tray Pan Rack For pr- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing	\$470

FLAT LIFT OFF COVERS

Model Number	Description	For Use With	List F. O. B. Griffin
HS-5070	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27A-12M, SR48A-12M, SR60A-12M *SR60A-24M, *SR72A-24M, SR27A-12MD *SR60A-24MD4 (*2 of each cover required per model)	\$300
HS-5279	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36A-15M	\$300
HS-5071	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48A-18M, SR60A-18M, SR72A-18M SR48A-18MD4	\$300
HS-5072	Flat Lift-Off Stainless Steel Cover - SR27A-8	SR27A-8, SR27A-8D	\$300
HS-5073	Flat Lift-Off Stainless Steel Cover - SR48A-8	SR48A-8, SR60A-8	\$300
HS-5278	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36A-10	\$300
HS-5074	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48A-12, SR48A-12MD4, SR60A-12, SR72A-12	\$300
HS-5106	Flat Lift-Off Stainless Steel Cover - SR60A-16, SR72A-16	SR60A-16, SR27A-16	\$380
HS-5107	Flat Lift-Off Stainless Steel Cover - SR72A-18	SR72A-18	\$380
HS-5070 + HS-5071	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72A-30M, SR72A-30M6 (1 of each cover required per model)	\$300 (Each Cover)

COMPOSITE CUTTING BOARDS

Model Number	Description	For Use With	List F. O. B. Griffin
HS-5265	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Top & Mega Top	\$290
HS-5266	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Top & Mega Top	\$380
HS-5267	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Top & Mega Top	\$510
HS-5268	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Top & Mega Top	\$630
HS-5269	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Top & Mega Top	\$760
HS-5270	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Prep Tables	\$930
HS-5271	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Prep Table	\$1,400
HS-5272	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Prep Table	\$1,960

GLASS DOOR MERCHANDISER ACCESSORIES

Model Number	Description	For Use With	List F. O. B. Griffin
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC	\$160
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC	\$170
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC	\$170
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC	\$170
HS-5290	Price Tag Holder	RM-10-HC	\$20

GLASS DOOR MERCHANDISER ACCESSORIES - CONTINUED

HS-5292	Price Tag Holder	RM-26-HC	\$20
HS-5294	Price Tag Holder	RM-45-SD-HC	\$20
HS-5296	Price Tag Holder	RM-49-HC	\$20
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC	\$110
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC	\$150
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC	\$150
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC	\$150
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC	\$70
HS-5344	Epoxy Floor Shelf	RM-7-HC	\$50
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC	\$120
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC	\$150
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC	\$150
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC	\$170
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC	\$170

BACK BAR ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5408	Low Profile 3" Casters & Rail (2 rails, 4 casters & hardware)	BB59, BB69, BB59-G, BB69-G, CC50, CC65, DD59, DD69	\$450
HS-5409	Low Profile 3" Casters & Rail (3 rails, 6 casters & hardware)	BB80, BB95, BB80-G, BB95-G, CC80, CC95, DD80, DD95	\$780
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$280
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80	\$280
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, DD80, BB80-G	\$280
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$560
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G, BB69-G, DD59, DD69, DD95	\$560
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, DD80, BB80-G	\$560
HS-5417	Flat Shelf, 59" & Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80	\$110
HS-5418	Flat Shelf, 69" & 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G	\$110
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80	\$110
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80	\$110
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models	\$110
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	All Back Bar	\$130

MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands	\$40
HS-4009	12" Rail Divider Bar	Prep Tables	\$30
HS-5069	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Top & Mega Top Prep Tables	\$30
HS-5280	Full Size Pan Adapter Bar for UR27A-8 Rail	Sandwich Top Prep Tables	\$40

MISCELLANEOUS ACCESSORIES - CONTINUED

HS-5281	Full Size Pan Adapter Bar for SR36A-10 Rail	Sandwich Top Prep Tables	\$40
HS-5075	Stainless Back - 27" Horizontal Models (factory installed only)	Refrigerator & Prep	\$420
HS-5476	Black kickplate for HR15A	HR15A	\$30
HS-5171	Stainless Back - 27" Horizontal Models (factory installed only)	Freezer	\$430
HS-5277	Stainless Back - 36" Horizontal Models (factory installed only)	Refrigerator, Freezer	\$480
HS-5076	Stainless Back - 48" Horizontal Models (factory installed only)	Refrigerator	\$540
HS-5527	Stainless Back - 48" Horizontal Models (factory installed only)	Freezer & Prep	\$540
HS-5085	Stainless Back - 60" Horizontal Models (factory installed only)	Refrigerator	\$610
HS-5170	Stainless Back - 60" Horizontal Models (factory installed only)	Freezer & Prep	\$610
HS-5086	Stainless Back - 72" Horizontal Models (factory installed only)	Prep	\$710
HS-5528	Stainless Back - 72" Horizontal Models (factory installed only)	Refrigerator	\$710
HS-5112	Stacking Kit - UR27A & UF27A	Undercounters	\$440
HS-5184	All Mega Top divider front to back	Mega Top Prep Tables	\$40
HS-5185	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Top & Mega Top Prep Tables	\$30
HS-5186	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables	\$30
HS-5187	Sandwich Prep 27-8 divider front to back	Sandwich Top Prep Tables	\$30
HS-5188	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Top Prep Tables	\$30
HS-5189	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$30
HS-5190	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Top Prep Tables	\$30
HS-5191	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$40
HS-5192	Sandwich Prep 18 pan openings side to side (center)	Sandwich Top Prep Tables	\$40
HS-5453	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Prep Tables	\$430
HS-5462	Heated Condensate Pan	Steelheart Uprights	\$450
HS-5526	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart Uprights	\$870
HS-5525	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart Uprights	\$1660
HS-5496	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart Uprights	\$870
HS-5497	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart Uprights	\$1660

ECONOMY SERIES

Model Number	Description	For Use With	List F. O. B. Griffin
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer	\$240
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer	\$250



OUR COMMITMENT TO OUR CUSTOMERS

Our commitment to quality continues after the sale. To ensure your HOSHIZAKI equipment operates at its optimum, we provide the following:

Customer Service

800-438-6087

For assistance with orders or finding a local distributor

- ▶ Established Field Service Network - hoshizakiamerica.com/locate-service-rep
- ▶ QR Code on the back of each unit for easy access to warranty and service information.
- ▶ Toll-Free Technical Support 24 hours/day (including holidays)
- ▶ Basic and Advanced training
- ▶ User-Friendly Website
 - Product Information
 - FAQ
 - Library of literature
 - Videos
 - Manuals
 - Tech tips/guides
 - Warranty information



Toll-Free Technical Support Line 24 hours

7 days a week, (including holidays)

800-233-1940



HOSHIZAKI. BEYOND STRONG.

HOSHIZAKI AMERICA, INC.

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

hoshizakiamerica.com

Item #40067 | 03-22-21

